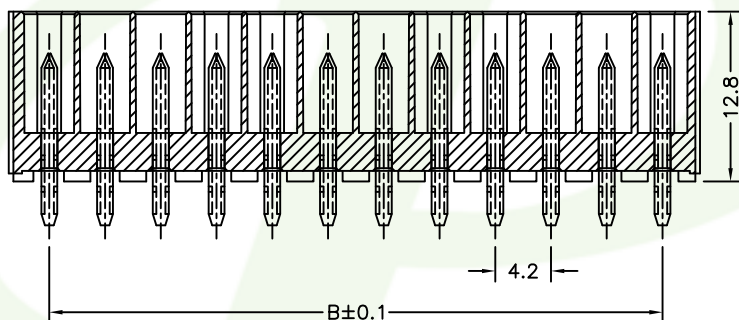

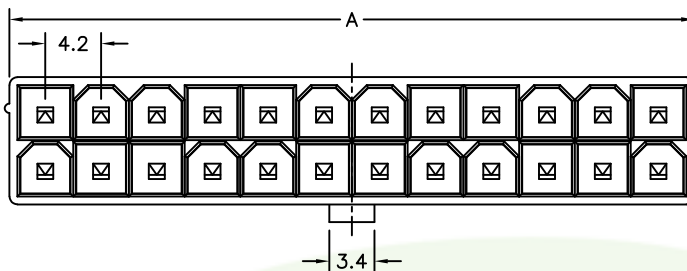


Recommended P.C.B Layout

## MATERIAL

Insulator : NYLON 66 UL94V-2

Contact Pin : Brass

## SPECIFICATION

Current Rate : 8A AC,DC

Voltage Rating : 500V AC,DC

Insulation Resistance : 1000MΩMin

Operation Temperature : -25°C to + 85°C

740-7 1-xx T S 0 x  
1 2 3 4 5 6


- 7: Green Product
- No. of contacts
- T: Tin plated
- S: Crystal insulator
- 0: Without post
- Pinrex internal code.



| Circuits | DIM A | DIM B |
|----------|-------|-------|
| 2        | 5.2   |       |
| 4        | 9.4   | 4.2   |
| 6        | 13.6  | 8.4   |
| 8        | 17.8  | 12.6  |
| 10       | 22.0  | 16.8  |
| 12       | 26.2  | 21.0  |
| 14       | 30.4  | 25.2  |
| 16       | 34.6  | 29.4  |
| 18       | 38.8  | 33.6  |
| 20       | 43.0  | 37.8  |
| 22       | 47.2  | 42.0  |
| 24       | 51.4  | 46.2  |

## TOLERANCE

.0 = ±.30  
.00 = ±.20  
.000 = ±.XXX  
.0000 = ±.  
ANG. = ±3°



UNITS : mm

SCALE NONE SIZE A4

OLD PART NO.

DRAWER 姜文慧

SHEET 1 OF 1 REV. A

TITLE

POWER CONNECTOR 4.2MM  
STRAIGHT TYPE

NEW PART NO.

740-71-xxTS0x



頻銳科技股份有限公司  
PINREX TECHNOLOGY CORP.

DRAW NO.

740-71-xxTS0x(網頁專用圖)

| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | RELEASE     | 2020/11/23 |