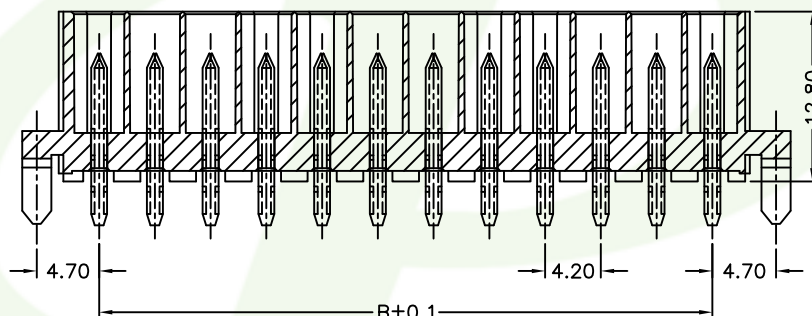

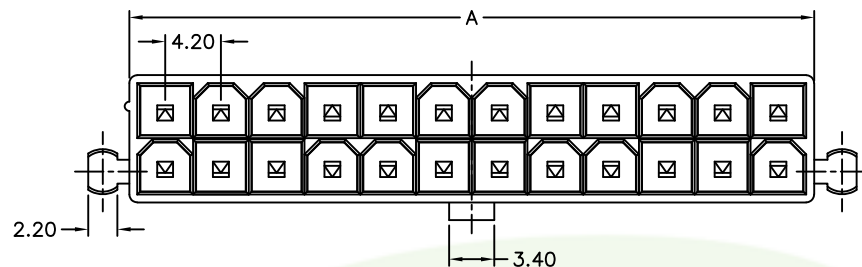


Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 66 UL94V-2

Contact Pin : Brass

SPECIFICATION

Current Rate : 8A AC,DC

Voltage Rating : 500V AC,DC

Insulation Resistance : 1000MΩMin

Operation Temperature : -25°C to + 85°C

740-7 1-xx T S 1 x
1 2 3 4 5 6


1. 7: Green Product
2. No. of contacts
3. T: Tin plated
4. S: Crystal insulator
5. 1: With post
6. Pinrex internal code.



Circuits	DIM A	DIM B
2	5.2	
4	9.4	4.2
6	13.6	8.4
8	17.8	12.6
10	22.0	16.8
12	26.2	21.0
14	30.4	25.2
16	34.6	29.4
18	38.8	33.6
20	43.0	37.8
22	47.2	42.0
24	51.4	46.2

TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'



UNITS : mm

SCALE NONE SIZE A4

OLD PART NO.

DRAWER 姜文慧

SHEET 1 OF 1 REV. A

TITLE

POWER CONNECTOR 4.2MM
STRAIGHT TYPE WITH POST

NEW PART NO.

740-71-xxTS1x



頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.

740-71-xxTS1x(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/23