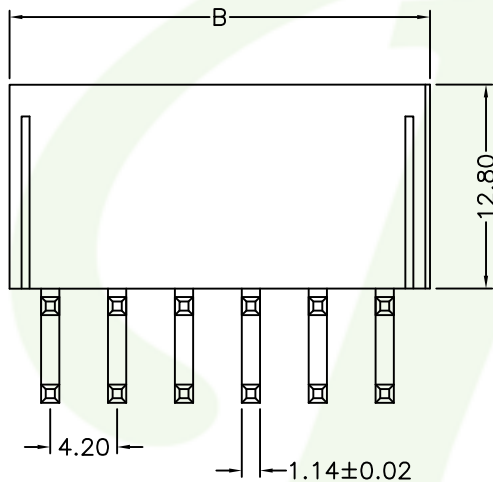
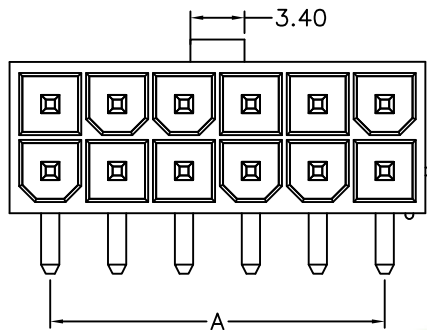


Recommended P.C.B Layout

MATERIAL

Insulator: NY66 UL94-V2

Contact Pin : Brass

SPECIFICATION

Current Rate : 8A AC,DC

Voltage Rating : 500V AC,DC

Insulation Resistance : 1000MΩMin.

Withstand voltage : 1500V AC/minute

Operation Temperature: -25°C to +85°C


740-7 2-xx T S 0 x
1 2 3 4 5 6

1. 7: Green Product
2. No. of contacts
3. T: Tin plated
4. S: Crystal insulator
5. 0: W/O post, W/O ear
6. 3: Pinrex internal code.

CKTS.	DIM A	DIM B
2		5.4
4	4.20	9.6
6	8.40	13.8
8	12.60	18.0
10	16.80	22.2
12	21.00	26.4
14	25.20	30.6
16	29.40	34.8
18	33.60	39.0
20	37.80	43.2
22	42.00	47.4
24	46.20	51.6

DIM:A,B tolerance:
2X1P~2X4P±0.30
2X5P~2X8P±0.40
2X9P~2X12P±0.50



			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE Power Connector 4.2mm Right Angle Type		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30		DRAWER	CHECK			
			.00	=±.20		麦文慧	李劍			
			.000	=±.08						
A	RELEASE	2020/11/24	.0000=±.			SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		SCALE NONE	SIZE A4	1 OF 1	李劍	740-72-xxTS0x	740-72-xxTS0x(網頁專用圖)