

MATERIAL

Insulator : NYLON 66 UL94 V-2

Contact Pin : Brass


SPECIFICATION

Current Rate : 8A AC,DC

Voltage Rating : 500V AC,DC



Insulation Resistance : 1000MΩMin.

Operation Temperature : -25°C to + 105°C

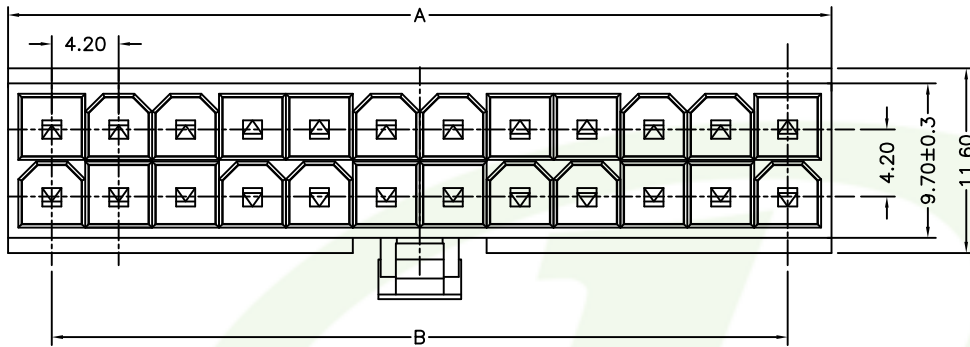

740-7 5-M xx S 03
1 2 3 4 5

1. 7: Green Product
2. M: Male
3. No. of contacts
4. S: Crystal insulator
5. Pinrex internal code.

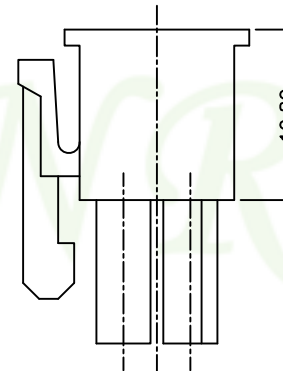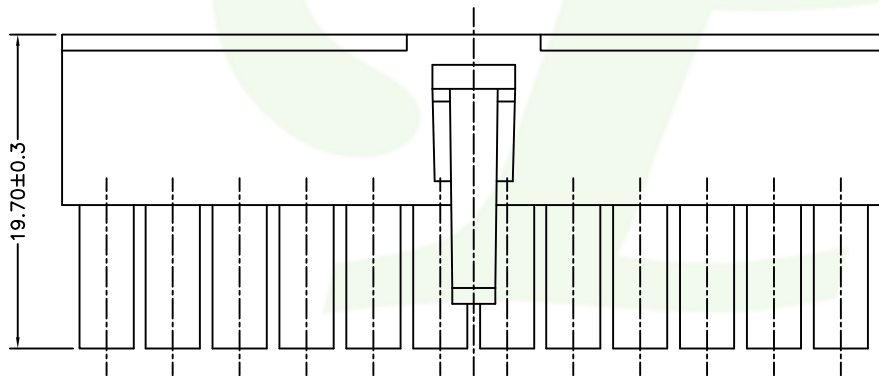

Circuits	Dim. A	Dim. B
2	5.5	
4	9.7	4.2
6	13.9	8.4
8	18.1	12.6
10	22.3	16.8
12	26.5	21.0
14	30.7	25.2
16	34.9	29.4
18	39.1	33.6
20	43.3	37.8
22	47.5	42.0
24	51.7	46.2



TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
.0	±.30		SCALE	SIZE	DRAWER	CHECK	4.2mm HOUSING(MALE)Dual Rows		
.00	±.25		NONE	A4	李偉	李劍			
.000	±.XXX				REV. A	APP'D			
.0000	±.								
ANG.=±3°									
REV.	DESCRIPTION	DATE			SHEET	NEW PART NO.	DRAW NO.		
A	RELEASE	2020/11/13			1 OF 1	740-75-MxxSxx	740-75-MxxSxx(網頁專用圖)		