
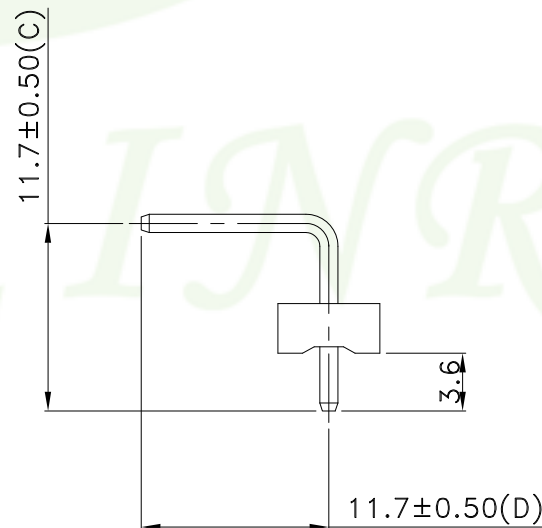


Recommant PCB Layout

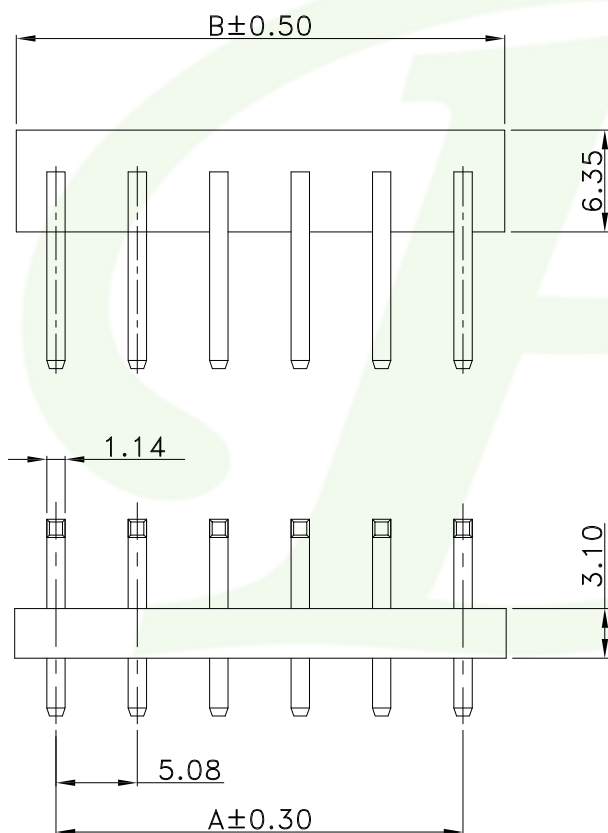

SPECIFICATIONS

- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min.
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 10m Ω max.

WAFER

- Material : Contact : Brass
Base : PA66 UL94V-2

Poles	Dimensions(mm)	
	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80

759-74-xx T W x x
1 2 3 4 5

1. 7: Green Product
2. No. of contacts per row
3. T: Tin plated
4. W: Nature insulator
5. Pinrex internal code.

			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE 5.08mm Disconnectable Crimp Style R/A Wafer	 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 = ±.30	.00 = ±.20		DRAWER 姜文慧	CHECK 李创		
			.000 = ±.XXX	.0000 = ±.	SCALE NONE	SHEET 1 OF 1	REV. A	APP'D 李创	NEW PART NO. 759-74-xxTWxx
A	RELEASE	2020/11/25	ANG. = ±3'		SIZE A4				DRAW NO. 759-74-xxTWxx (網頁專用圖)
REV.	DESCRIPTION	DATE							