

HOUSING

Material : Nylon 66 UL94V-2

SPECIFICATION

Current rating : 5A AC/DC

Withstanding voltage : 1,500V AC/minute



Insulation Resistance : 1,000MΩ Min

Contact Resistance : 10mΩ Max




759-75-xx W xxx
1 2 3 4

1. 7: Green Product
2. No. of contacts per row
3. W: Nature insulator
4. Pinrex internal code.

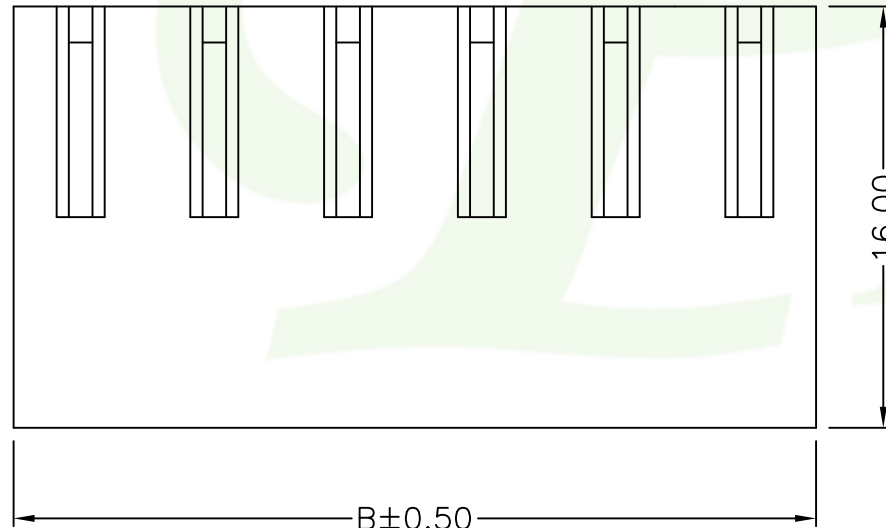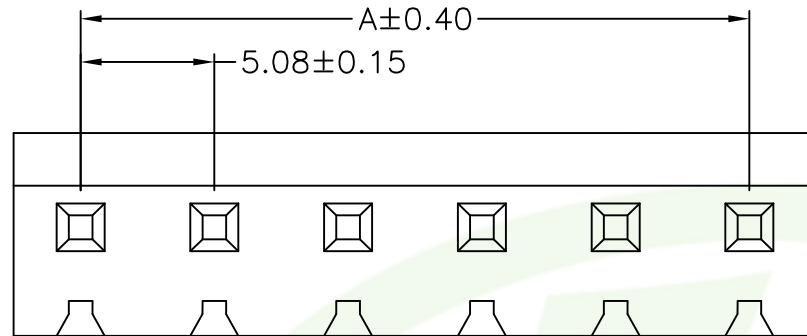

CIRCUITS	DIM A	DIM B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80

			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE 5.08mm HOUSING		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30			DRAWER 姜文慧	CHECK 李劍			
			.00 =±.20		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 759-75-xxWxxx
A	RELEASE	2020/11/25	.0000=±.							DRAW NO. 759-75-xxWxxx(網頁專用圖)
REV.	DESCRIPTION	DATE	ANG.=±3'							