
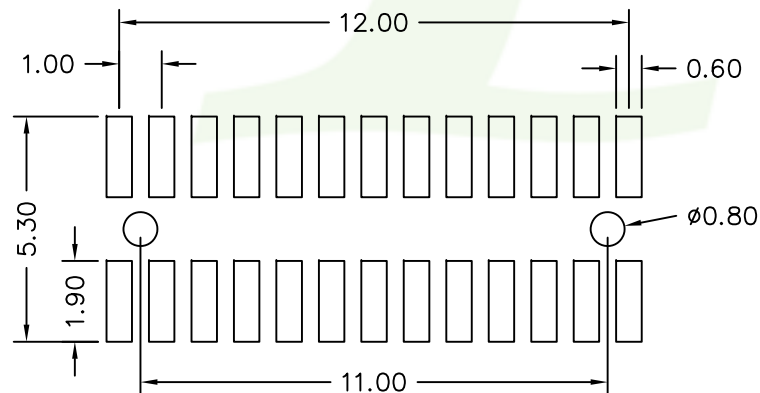
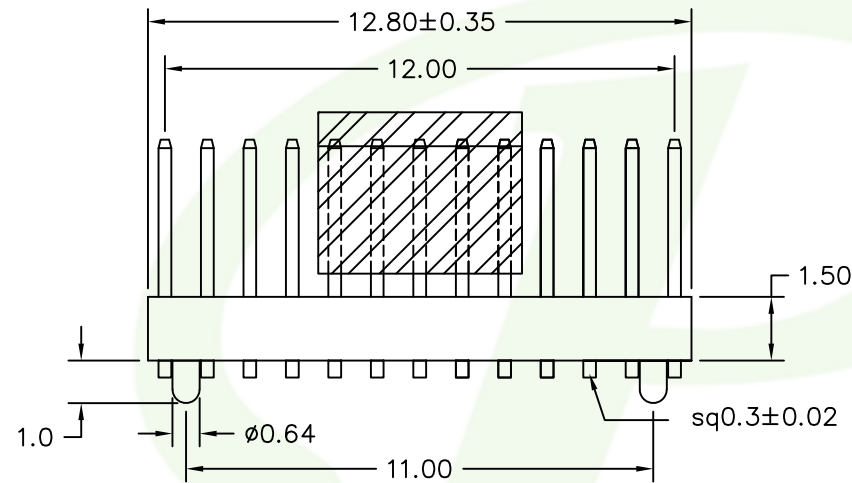


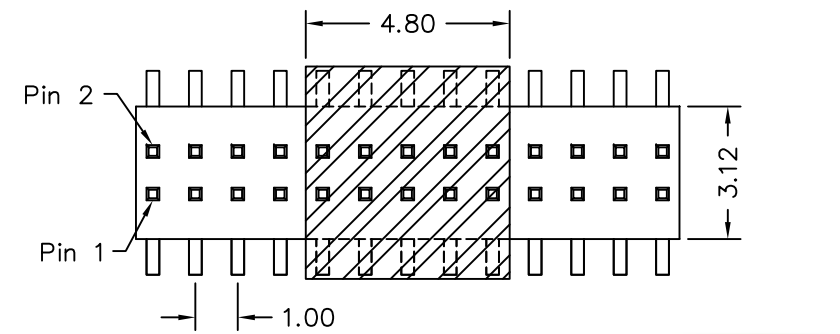

Recommended P.C.B Layout

MATERIAL

Insulator: Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

252-x 7- xx x x xx
1 2 3 4 5 6

- 5: Normal Parts
7: Green Product
9: Green Product High Temp
- 7: Dual rows
Plastic Height=1.5mm
- No. of contacts per row
- G: Gold flash
S: Selective
T: Tin plated
- B: Black Insulator
- Pinrex internal code.



			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE PIN HEADER 1.0*1.0mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.5mm,CAP+T/R	頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
REV.	DESCRIPTION	DATE	.0	=±.30		DRAWER	CHECK		
A	RELEASE	2020/10/23	.00	=±.25	SCALE	SIZE	SHEET	REV.	APP'D
			.000	=±.XXX	NONE	A4	1 OF 1	A	李創
			.0000=±.						
			ANG.=±3'						
						NEW PART NO.		DRAW NO.	
						252-9x-xxxxxx		252-x7-xxxxxx(網頁專用圖)	