
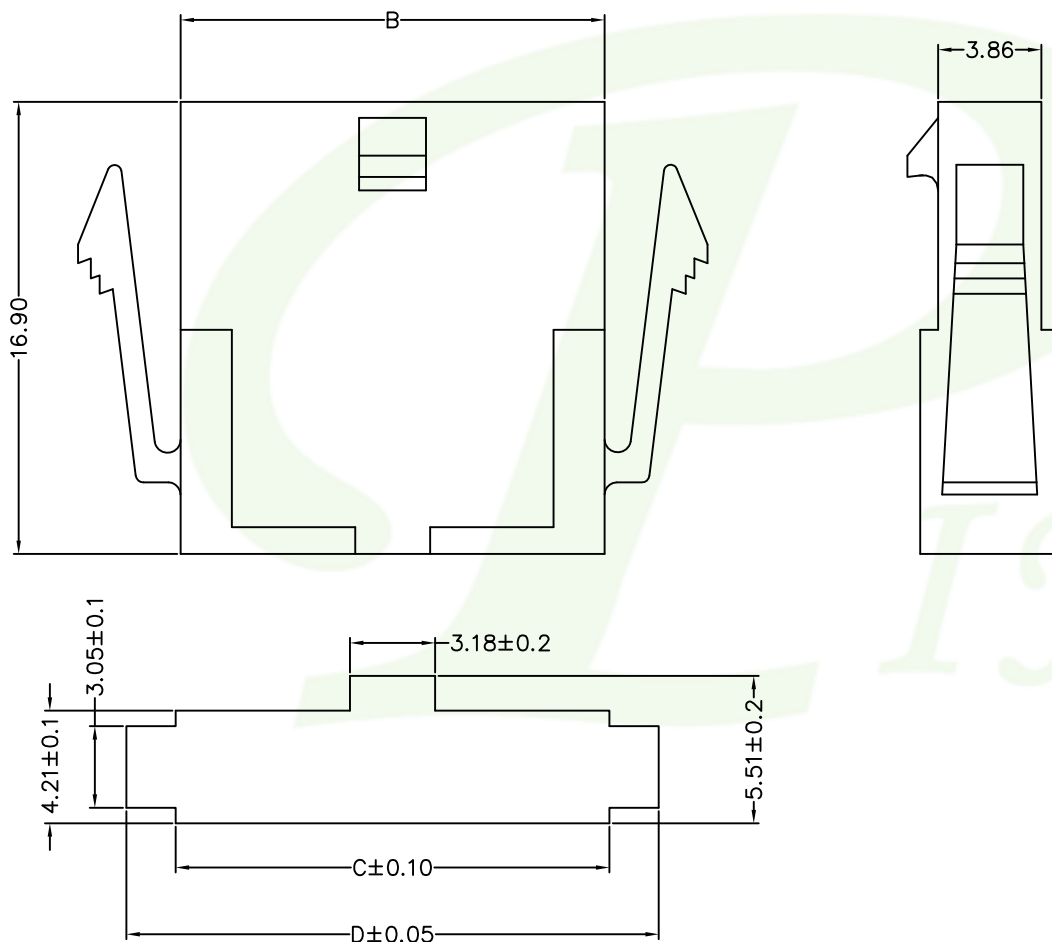


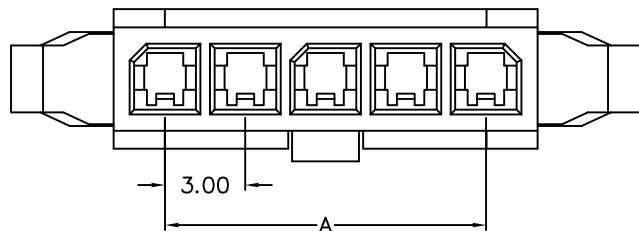

PANEL OPENING [Recommended panel thickness:.062"(1.57mm)]

Current rating:

Wire size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

MATERIAL

Insulatot : UL94-V0 Nylon66

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)




733-7 5-F 1xx x x
1 2 3 4 5

1. 5: 3.0mm Housing
2. F: Female
3. 1xx: 1*xxp
4. B: Black Insulator
5. Pinrex internal code.

Circuits	Dim.A	Dim.B	Dim.C	Dim.D
2	3.00	6.85	7.21	10.9
3	6.00	9.85	10.21	13.9
4	9.00	12.85	13.21	16.9
5	12.00	15.85	16.21	19.9
6	15.00	18.85	19.21	22.9
7	18.00	21.85	22.21	25.9
8	21.00	24.85	25.21	28.9
9	24.00	27.85	28.21	31.9
10	27.00	30.85	31.21	34.9
11	30.00	33.85	34.21	37.9
12	33.00	36.85	37.21	40.9

PINREX 频锐科技股份有限公司
PINREX TECHNOLOGY CORP.
DRAW NO. 733-75-F1xxxx(網頁專用圖)

		TOLERANCE
		.0 =±0.4
		.00 =±0.25
		.000 =±0.08
A	RELEASE	2020/11/24
REV.	DESCRIPTION	DATE
		ANG.=±X°



OLD PART NO.		TITLE	
DRAWER	李剑	Power Connector 3.0mm Single Row Housing(Female)	
CHECK	李剑		
APP'D	李剑		

NEW PART NO.	
733-75-F1xxxx	