
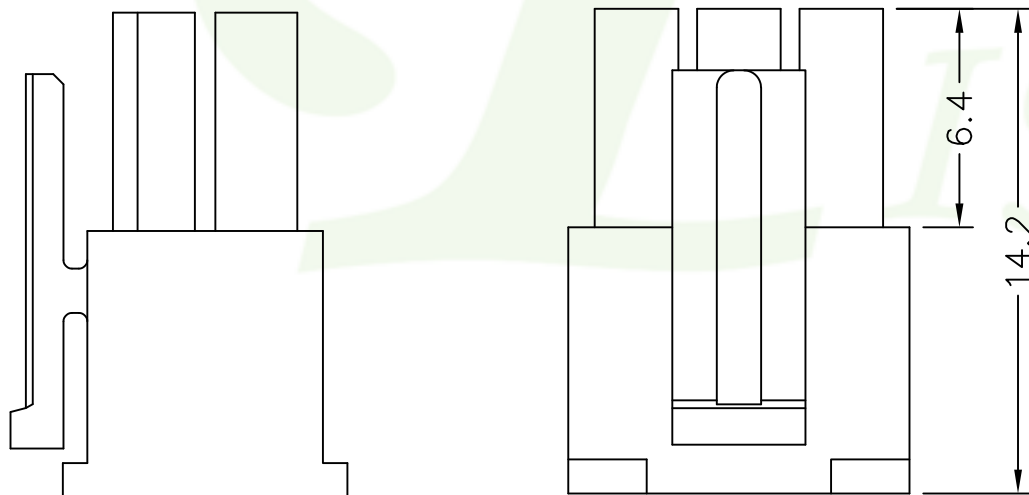


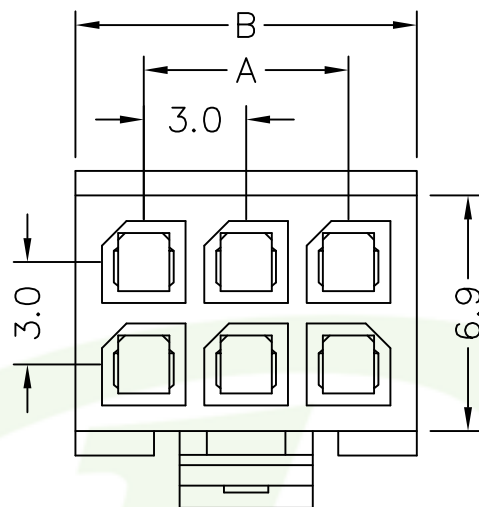

MATERIAL

Insulatot : UL94-V0 Nylon66

SPECIFICATION

Current Rate :

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
AMP	5A	5A	4A	3A	2A	1A

Voltage rating : 250V

Dielectric Strength : 1500V AC/minute

Insulation resistance : 1000mΩmin.

Temperature rise : 30°C max.(carry rated current load)

733-7 5- M 2 xx x x
1 2 3 4 5 6

- 5: Housing
- M: Male
- 2: Dual rows
- No. of contacts per row
- B: Black Insulator
- Pinrex internal code.

POLES	DJIM A	DIM B
2		4.0
4	3.0	7.0
6	6.0	10.0
8	9.0	13.0
10	12.0	16.0
12	15.0	19.0
14	18.0	22.0
16	21.0	25.0
18	24.0	28.0
20	27.0	31.0
22	30.0	34.0
24	33.0	37.0

			<u>TOLERANCE</u>				OLD PART NO.		TITLE Power Connector 3.0mm Dual Rows Housing (Male)		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.40 .00 =±.30 .000 =±.XXX		UNITS : mm		DRAWER 姜文慧				
A	RELEASE	2020/11/24	.0000=±. ANG.=±3'		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 733-75-M2xxxx	
REV.	DESCRIPTION	DATE									