

Features:

Poles: 2-24

Material: :Nylon 66 UL 94V-2

Electrical:

Voltage rating: 500V AC/DC

Current rating: 8A max

Nithstanding Voltage: 1500V AC/minute

Insulation Resistance: 1000M Ω min

740-7 $\frac{5-F}{1} \frac{xx}{2} \frac{S}{3} \frac{xx}{4} \frac{5}{5}$

1. 5: Housing
2. F: Female
3. NO. of contacts per row
4. S: Crystal insulator
5. Pinrex internal code.

CKTS.	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"
2		5.6	10.8	5.8
4	4.20	9.8	15.0	10.0
6	8.40	14.0	19.2	14.2
8	12.60	18.2	23.4	18.4
10	16.80	22.4	27.6	22.6
12	21.00	26.6	31.8	26.8
14	25.20	30.8	36.0	31.1
16	29.40	35.0	40.2	35.3
18	33.60	39.2	44.4	39.5
20	37.80	43.4	48.6	43.7
22	42.00	47.6	52.8	47.9
24	46.20	51.8	57.0	52.1

A&B DIM.TOLERANCE:


2 ~ 8P: A $\pm$ 0.20 B $\pm$ 0.30

10~16P: A $\pm$ 0.30 B $\pm$ 0.40

18~24P: A $\pm$ 0.40 B $\pm$ 0.50



panel hole dimensions

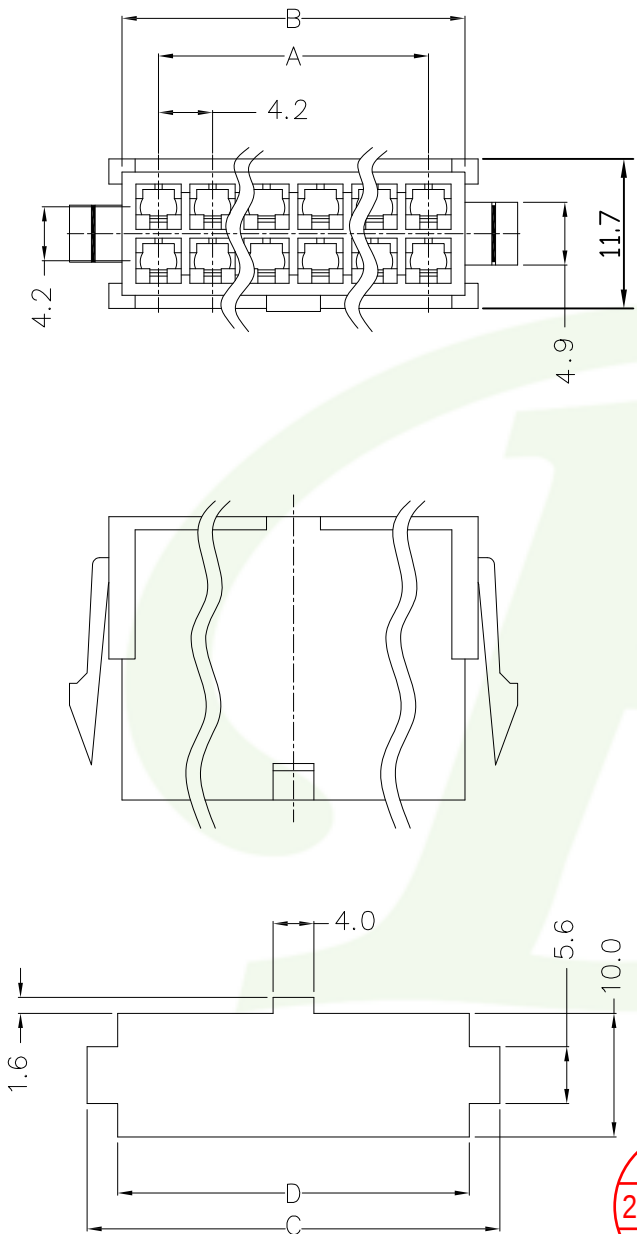

UNITS : mm

SCALE NONE SIZE A4

OLD PART NO.

DRAWER 刘伟青 CHECK 李劍

SHEET 1 OF 1 REV. A APP'D 李劍

TITLE

4.2mm Housing(FEMALE)
Dual Rows

NEW PART NO.

740-75-FxxSxx



頻銳科技股份有限公司

PINREX TECHNOLOGY CORP.

DRAW NO.

740-75-FxxSxx(網頁專用圖)

TOLERANCE

.0 = $\pm$.30
.00 = $\pm$.20
.000 = $\pm$.XXX
.0000= $\pm$.
ANG.= $\pm$ 3'

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/13