

NOTE:

1.MATERIAL:

HOUSING: UL94V-0, COLOR: BLACK.

CONTACT: PHOSPHOR BRONZE.

2.FINISH:

CONTACT AREA: TIN PLATING 100 μ " THICKNESS MIN.

SOLDERING AREA: TIN PLATING 100 μ " THICKNESS MIN.;

UNDER PLATING: NICKEL PLATING 50 μ " THICKNESS MIN. OVERALL.



979- $\frac{3}{1} \times \frac{2}{2} - \frac{2}{3} \times \frac{4}{4} \frac{0}{5} \frac{x}{6} \frac{x}{7}$

1. 3: Pitch=1.0

2. 1: Tube

3: T/R


3. 2: None ZIF

4. No. of contacts per row

5. 4: SMT 90° Dual contact

6. 0: Tin plated; Black Insulator

7. Pinrex internal code.

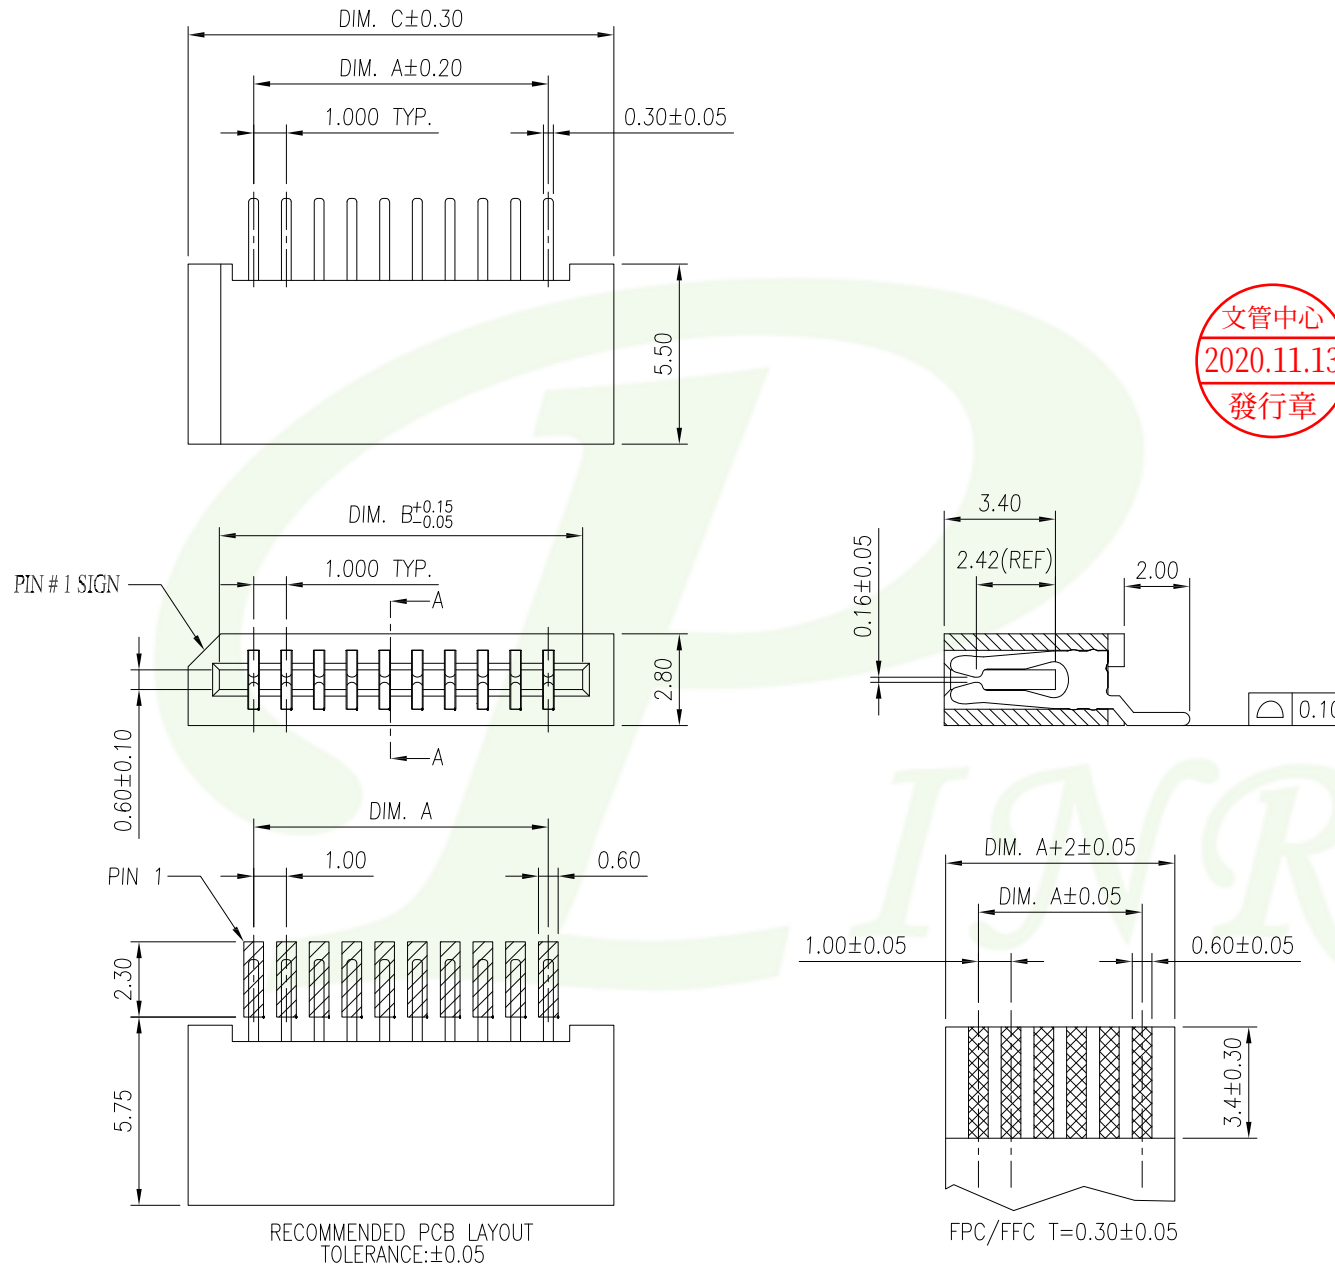

POS.	DIMENSION			POS.	DIMENSION		
	A	B	C		A	B	C
3	2.00	4.10	6.00	17	16.00	18.10	20.00
4	3.00	5.10	7.00	18	17.00	19.10	21.00
5	4.00	6.10	8.00	19	18.00	20.10	22.00
6	5.00	7.10	9.00	20	19.00	21.10	23.00
7	6.00	8.10	10.00	21	20.00	22.10	24.00
8	7.00	9.10	11.00	22	21.00	23.10	25.00
9	8.00	10.10	12.00	23	22.00	24.10	26.00
10	9.00	11.10	13.00	24	23.00	25.10	27.00
11	10.00	12.10	14.00	25	24.00	26.10	28.00
12	11.00	13.10	15.00	26	25.00	27.10	29.00
13	12.00	14.10	16.00	27	26.00	28.10	30.00
14	13.00	15.10	17.00	28	27.00	29.10	31.00
15	14.00	16.10	18.00	29	28.00	30.10	32.00
16	15.00	17.10	19.00	30	29.00	31.10	33.00

			TOLERANCE		 UNITS : mm		OLD PART NO.		TITLE FPC/FFC 1.0mm NON ZIF SIDE ENTRY, DUAL CONTACT, SMT 90° TYPE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30			DRAWER 麦文慧				
			.00	=±.20							
			.000	=±.XXX							
A	RELEASE	2020/11/12	.0000=±.								
REV.	DESCRIPTION	DATE	ANG.=±3'		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	NEW PART NO. 979-3x-2xx40x	DRAW NO. 979-3x-2xx40x(網頁專用圖)