

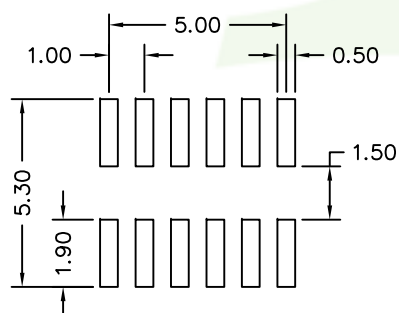
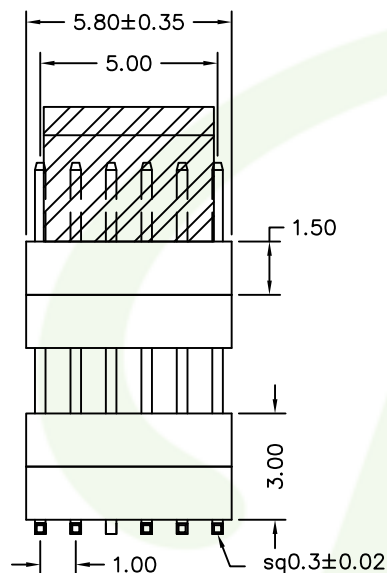


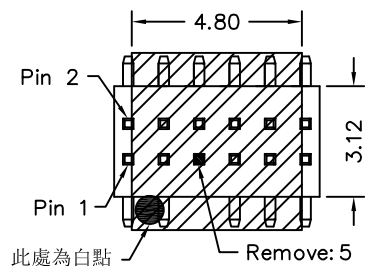

Recommended P.C.B Layout

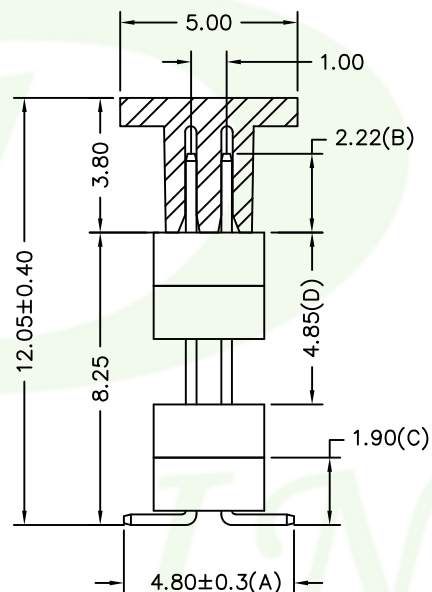

MATERIAL

Insulator : Thermoplastic High Temp Halogen free UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operating Temperature : -40°C to + 105°C


25I-Hx 7- xx x x xx
1 2 3 4 5 6

- H9: Halogen free
Green Product High Temp
5: Normal Parts
7: Green Product
- 7: Dual rows
Plastic Height=1.5mm
- No. of contacts per row
- G: Gold flash
S: Selective
B: 10U" Gold plated
- B: Black Insulator
- Pinrex internal code.



TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'



UNITS : mm

SCALE NONE SHEET 1 OF 1

OLD PART NO.

DRAWER 姜文慧

REV. A

CHECK

李劍

APP'D 李劍

TITLE

PIN HEADER 1.0*1.0mm
SMT S/T TYPE, DUAL ROWS
CAP+T/R

NEW PART NO.

25I-Hx7-xxxxxx



頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.

25I-Hx7-xxxxxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/10/23