





Top View

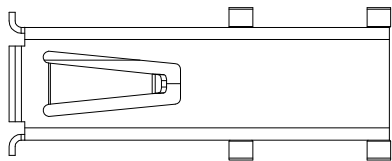

Side View

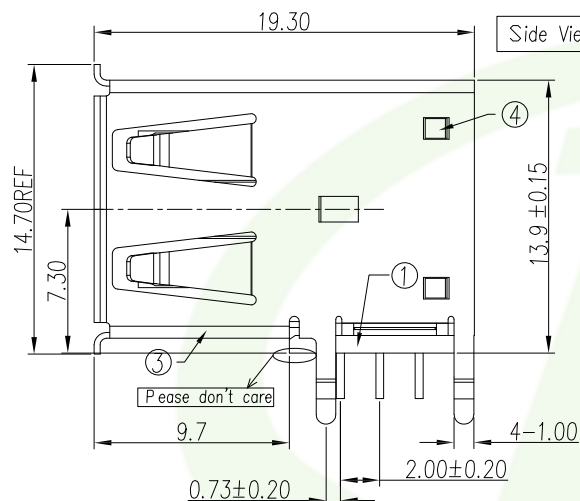


Front View

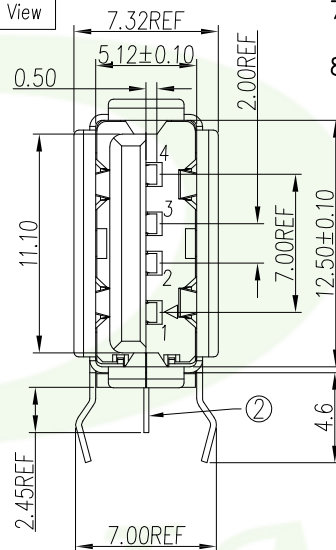

Specification:

- 1.Rated voltage and current:1A at 250V AC Min.
- 2.Dielectric withstanding voltage; 500V AC/1 minute without breakdown.
- 3.Contact resistance: Before life test 30m ohm Max.
After life test 50m ohm max
- 4.Insulation resistance:1000m ohm Min at DC 500V.
- 5.Insrtn force: 35 Newtons Max.
- 6.Extraction force: 10 Newtons Min.
- 7.Solderability: Terminal shall be immersed in flux before text,
Then dip in molten solder for 5±0.5 sec At 245±5°C
- 8.Temperature range: -55°C~+85°C

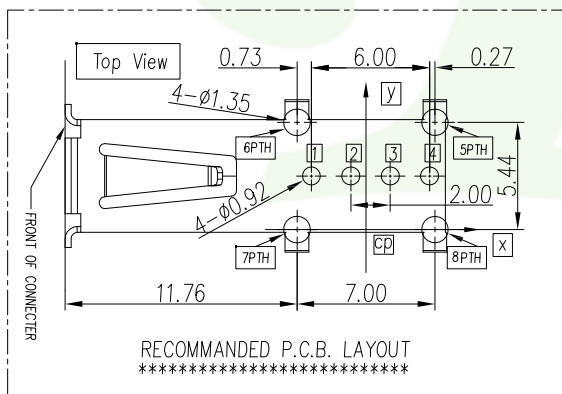


文管中心
2020.11.16
發行章

4	Back Shell	1	Brass	T=0.30mm	80u"min.Nickel Plated
3	Shell	1	KU570	T=0.30mm	100u"min.Nickel Plated
2	Contact	4	COPPER ALLOY	T=0.25mm	Contact area: Gold plated over 40u"Nickel min. Solder area: 80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	Black
NO.	Name	Q'ty	Material	Remarks&Thickness	Finish

TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3°



UNITS : mm

SCALE NONE
SIZE A4

OLD PART NO.

DRAWER 刘伟青

SHEET 1 OF 1

REV. A

CHECK 李劍

APP'D 李劍

TITLE

USB-A(F) 側向90° DIP

NEW PART NO.

984-11-6043xx



频锐科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.

984-11-6043xx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/13