

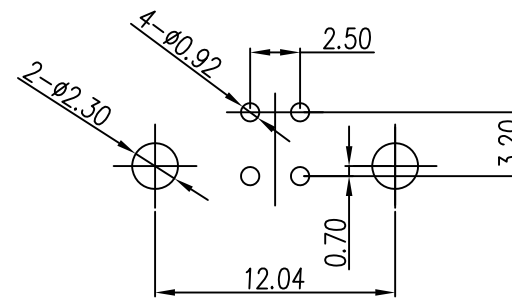


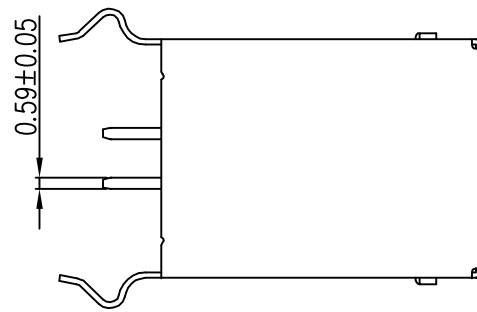

RECOMMENDED PCB LAYOUT

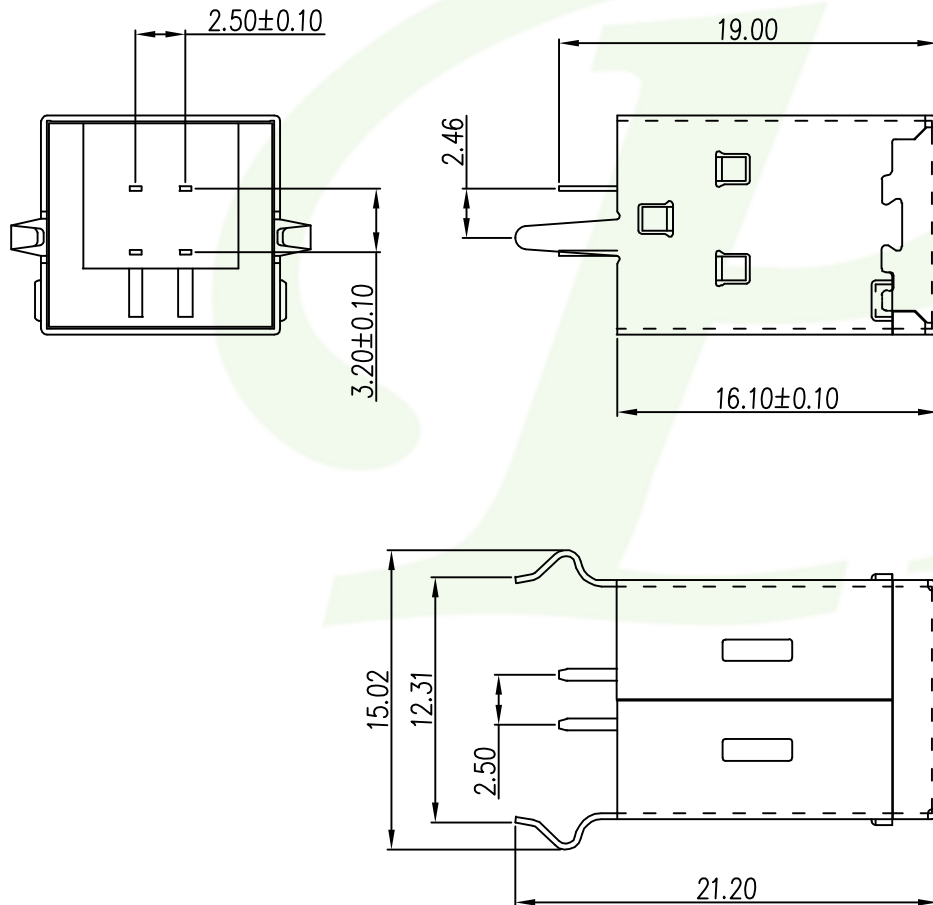

NOTES:

1.MATERIAL:

HOUSING: HI-TEMP PLASTIC, UL94V-0, WHITE
CONTACT: COPPER ALLOY
SHELL: SPCC

2.FINISH:

CONTACT:

CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: TIN PLATED
UNDER PLATING: NICKEL PLATED

SHELL:

SOLDER AREA: NICKEL PLATED

3.SPECIFICATION:

CURRENT RATING: 1A MAX.
VOLTAGE RATING: 100V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 30mΩ Max.
INSULATION RESISTANCE: 1000MΩ Min
OPERATING TEMPERATURE: -25°C to +85°C
DURABILITY: 10000 CYCLES MIN.
INSERTION FORCE: 35N MAX.
WITHDRAWAL FORCE: 10N MIN.

文管中心
2020.10.22
發行章

			TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°	 UNITS : mm	OLD PART NO.		TITLE	 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.				
					DRAWER 劉偉青	CHECK 李劍			USB-B Female Vertical DIP			
					SCALE	SIZE	SHEET		REV.	APP'D	NEW PART NO.	DRAW NO.
A	RELEASE	2020/10/19			NONE	A4	1 OF 1		A	李劍	984-2x-6xx1xx	984-2x-6xx1xx(網頁專用圖)