



Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding volage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

982-5 2- A xx 005
1 2 3 4 5

1. 5: Crimp type
2. 2: Tray
3. A: Male
B: Female
4. No of contacts
5. Pinrex internal code.
Black insulator

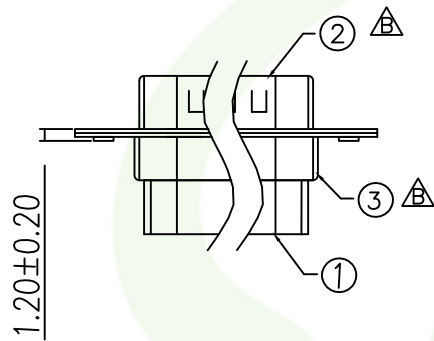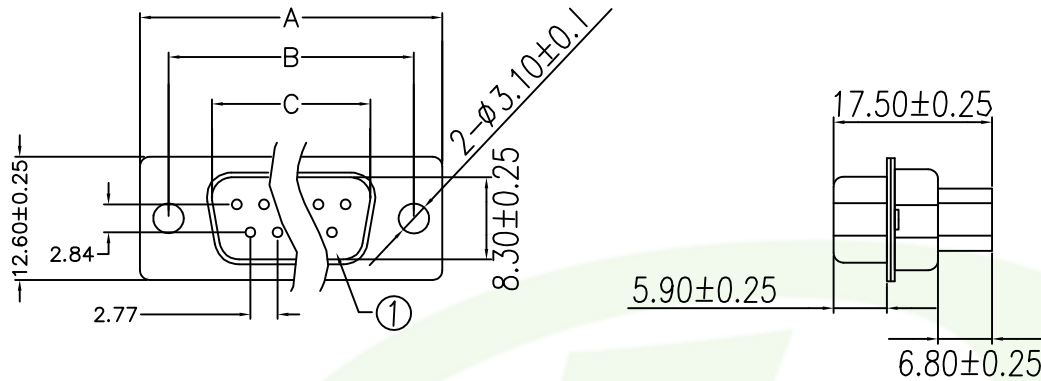

A	9PIN(M)	30.80±0.25	B	25.00±0.25	C	16.92±0.25
	15PIN(M)	39.20±0.25		33.32±0.25		25.25±0.25
	25PIN(M)	53.05±0.25		47.04±0.25		38.96±0.25
	37PIN(M)	69.40±0.25		63.50±0.25		55.42±0.25

文管中心
2020.10.10
發行章

A	前鉚型(不通孔)	B	后鉚型(通孔)

5	8.0 Nut	2	Brass	H4.75*8.0	80u"Min Nickel Plated
4	3B Nut	2	Brass	H4.75*4.75	80u"Min Nickel Plated
3	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80u"Min Tin Plated
2	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80u"iMin Nickel Plated
1	Back Housing	1	PA66	UL 94-V0	Black
	Front Housing	1	P.B.T	UL 94-V0	Black
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

TOLERANCE			OLD PART NO.		TITLE	
.0 =±.30			DRAWER 姜文慧		D-SUB CRIMP(M)	
.00 =±.20			CHECK 李剑		NEW PART NO. 982-52-Axx005	
.000 =±.XXX			SHEET 1 OF 1		DRAW NO. 982-52-Axx005(B版)	
.0000=±.			REV. B		PINREX TECHNOLOGY CORP.	
ANG.=±3'			SCALE NONE		頻銳科技股份有限公司	
REV.			SIZE A4		DATE 2020/10/10	
DESCRIPTION			DATE 2018/06/21		DATE 2020/10/10	