



Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range:-55°C~+105°C

982-5 2- B xx 0 0 5
1 2 3 4 5 6 7

1. 5: Crimp type
2. 2: Tray
3. A: STD Male
B: STD Female
4. No of contacts
5. 0: Black insulator
6. 0: non accessories
7. 5: Pinrex internal code.

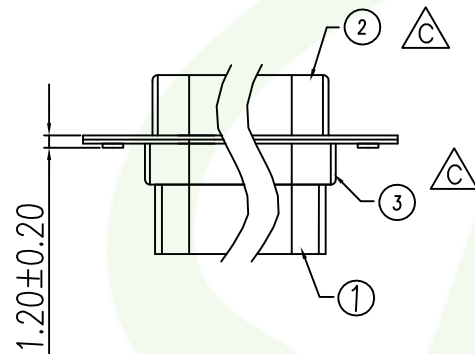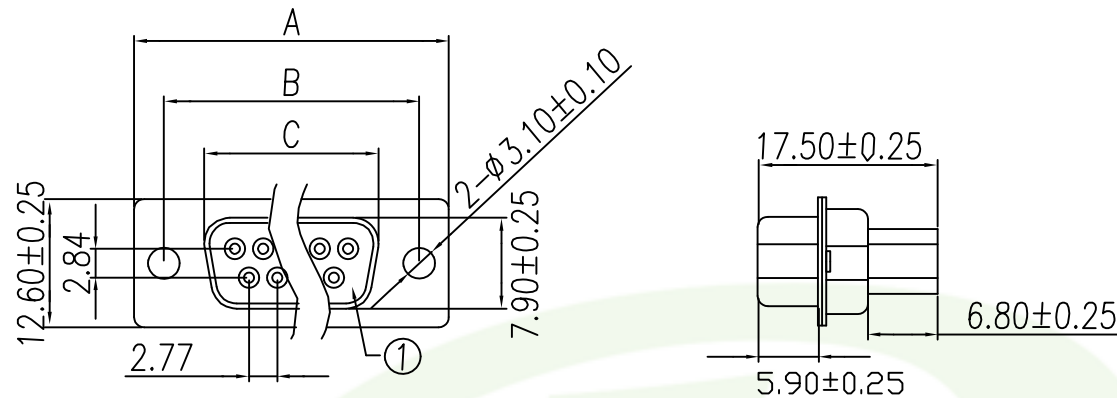

A	9PIN(F)	30.80±0.25	B	25.00±0.25	C	16.30±0.25
	15PIN(F)	39.20±0.25		33.32±0.25		24.70±0.25
	25PIN(F)	53.05±0.25		47.04±0.25		38.40±0.25
	37PIN(F)	69.40±0.25		63.50±0.25		54.80±0.25

A	前鉗型(不通孔)	B	后鉗型(通孔)
5.80±0.15		3.20±0.15	



5	8.0 Nut	2	Brass	H4.75*8.0	80u"Min Nickel Plated
4	3B Nut	2	Brass	H4.75*4.75	80u"Min Nickel Plated
3	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80u"Min Tin plated
2	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80u"Min Nickel plated
1	Back Housing	1	PA66	UL 94-V0	Black
	Front Housing	1	P.B.T	UL 94-V0	Black
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

REV.	DESCRIPTION	DATE	TOLERANCE	UNITS : mm	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
C	修正圖面,更新描述	2020/10/14	.0 =±.30		NONE	A4	1 OF 1	C	李劍	982-52-Bxx005	982-52-Bxx005(C版)
B	依廠商圖更新圖面	2018/06/07	.00 =±.20								
A	RELEASE	2010/11/11	.000 =±.XXX								
			.0000 =±.								
			ANG.=±3'								

OLD PART NO.

DRAWER 麦文慧

CHECK 李劍

SCALE NONE

SIZE A4

SHEET 1 OF 1

REV. C

APP'D 李劍

TITLE
D-Sub crimp type female (match with D-Sub Crimp female terminal: 982-51-F00005)

NEW PART NO.
982-52-Bxx005

DRAW NO.
982-52-Bxx005(C版)

PINREX 頻銳科技股份有限公司

PINREX TECHNOLOGY CORP.