

Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.

△ 1.2 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 1000 MΩ Min at DC 500V.

2.5 Temperature range: -55°C~+105°C



PART NO	Insertion force	Extraction force
15P	5.5 Kgf Max	1.5 Kgf Min
26P	7.5 Kgf Max	1.7 Kgf Min
44P	9.0 Kgf Max	2.5 Kgf Min
62P	11.5 Kgf Max	3.0 Kgf Min.

982-5 2- D XX 0 0 5
1 2 3 4 5 6 7 △

1. 5: Crimp type

2. 2: Tray

3. C: H.D Male

D: H.D Female

4. No of contacts




5. Black insulator

6. no accessories

5. Pinrex internal code.



6	Clip		Stainless steel	T=0.10mm	NO
5	8.0 Nut	2	Brass	H4.75*8.0	80u"min Nickel Plated
4	3B Nut	2	Brass	H4.75*4.75	80u"Nickel Plated
3	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu: 40u"min. 80u"min Tin Plc
2	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu: 40u"min. 80u"min Nickel Plc
1	Housing	2	P.B.T	UL 94-V0	Black
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

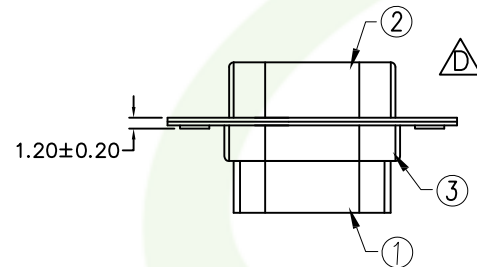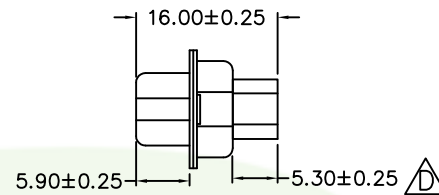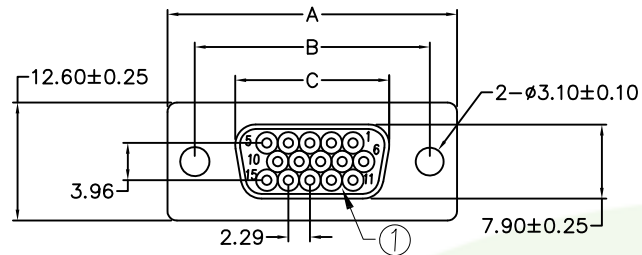

PART NO	A±0.25	B±0.25	C±0.25
15P	30.80	25.00	16.33
26P	39.20	33.32	24.66
44P	53.05	47.04	38.38
62P	69.40	63.50	54.84

A	前鉚型(不通孔)	B	後鉚型(通孔)

文管中心
2020.11.02
發行章



REV.	DESCRIPTION	DATE	TOLERANCE	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
D	UPDATE	2020/10/15	.0 =±.30	NONE	A4	1	D	李劍	982-52-DXX005	982-52-DXX005(D版)
C	REVISE DESCRIPTION	2017/07/14	.00 =±.20							
B	REVISE DESCRIPTION	2011/04/13	.000 =±.XXX							
A	RELEASE	2010/07/20	.0000=±.							
			ANG.=±3'							

OLD PART NO.

DRAWER 姜文慧

CHECK 李劍

SCALE NONE

SIZE A4

SHEET 1 OF 1

REV. D

APP'D 李劍

TITLE

D-SUB HD CIMP(F)match with 982-51-H00005(female terminal)

NEW PART NO. 982-52-DXX005

DRAW NO. 982-52-DXX005(D版)

PINREX TECHNOLOGY CORP.

頻銳科技股份有限公司