

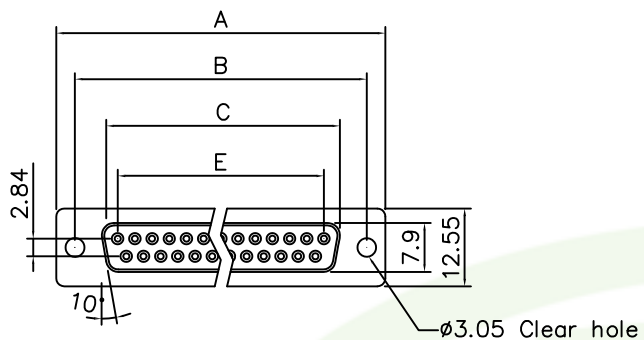
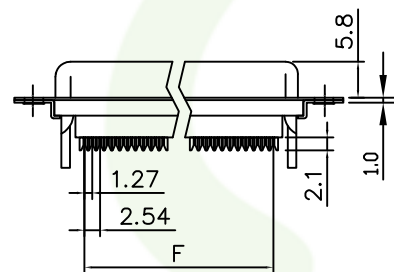


Cover

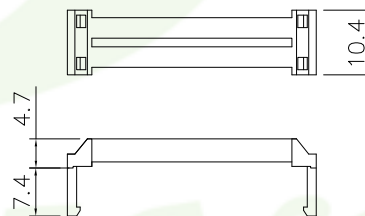

Without Insulator Support



Plastic Strain Relief



Metal Strain Relief

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Shell : Steel, 60u" Nickel Over 60u" min Copper

Electrical

Contact Resistance : 20 milliohms

Insulation Resistance : 1000

magohms at 500 VDC

Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

982- 4 1 - B xx x 0 x
1 2 3 4 5 6 7

1. 4: IDC type
2. 1: Tray
3. 2: 1.0 Female
B: 1.0 Female(Green Product)
4. No. of contacts
5. 0: Black ; Metal Strain Relief
1: Black ; Plastic Strain Relief
2: Black ; Without Strain Relief
3: Blue ; Metal Strain Relief
4: Blue ; Plastic Strain Relief
5: Blue ; Without Strain Relief
6. 0: Through hole
7. x: Pinrex internal code.

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.70	19.39	17.78
25	53.05	47.04	38.40	33.24	30.48
37	69.40	63.50	54.80	49.86	45.72



REV.	DESCRIPTION	DATE
A	RELEASE	2020/10/21

TOLERANCE
.0 = ±.30
.00 = ±.20
.000 = ±.XXX
.0000 = ±.
ANG. = ±3°

SCALE	SIZE
NONE	A4

OLD PART NO.	DRAWER	CHECK
	麦文慧	李劍
SHEET	REV.	APP'D
1 OF 1	A	李劍

TITLE
D-SUB IDC TYPE CONNECTOR Female
NEW PART NO.
982-41-Bxxx0x

DRAW NO.
982-41-Bxxx0x(網頁專用圖)

頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.