
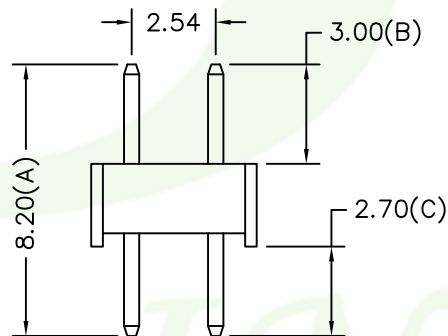
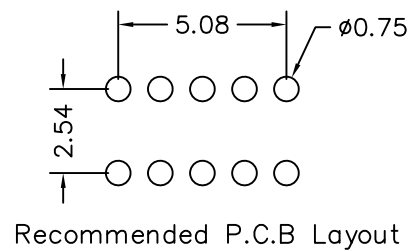
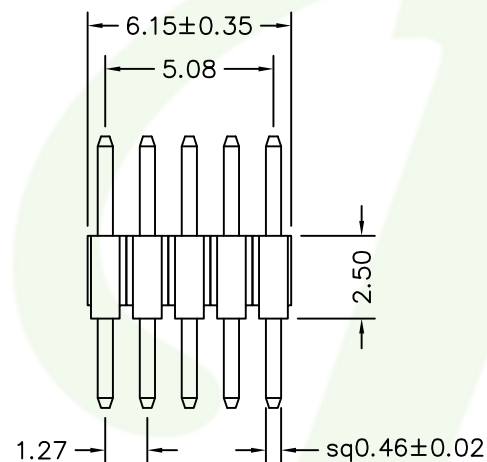


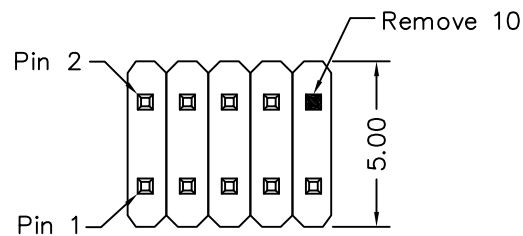

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operating Temperature:-40° C to +105° C

240-x 7- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 2: Dual rows
Plastic Height=1.7mm
7: Dual rows
Plastic Height=2.5mm
- No. of contacts per row
- G: Gold flash
- B: Black Insulator
- Pinrex internal code.



			TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3'		 UNITS : mm		OLD PART NO. DRAWER 姜文慧 CHECK 李劍		TITLE PIN HEADER 1.27*2.54mm STRAIGHT TYPE, DUAL ROWS LEAD FREE PROCESS		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
A	RELEASE	2020/10/23	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO.	DRAW NO.		
REV.	DESCRIPTION	DATE						240-x7-xxxxxx	240-x7-xxxxxx(網頁專用圖)		