

Note:

Specification:


1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

No. of contacts	unmating force	Mating force
PIN 15	1.5 Kgf Min	5.5 Kgf Max
PIN 26	1.7 Kgf Min	7.5 Kgf Max
PIN 44	2.5 Kgf Min	9.0 Kgf Max
PIN 62	3.0 Kgf Min	11.5 Kgf Max

$$982- \frac{2}{1} \frac{1}{2} - \frac{C}{3} \frac{xx}{4} \frac{x}{5} \frac{x}{6} \frac{x}{7}$$

1. 2: P.C.B. Straight type
2. 1: Tray
3. C: H.D. Male(GP)
4. No. of contacts
5. 1: Black insulator ; Gold flash
2: White insulator ; Selective
3: White insulator ; Gold flash
6. 0: Non accessories
- 1: Front rivet #4-40 H=4.0
3: Rear rivet #4-40 H=4.0
5: Rear rivet boardlock #4-40
6: Rear rivet boardlock #4-40
with screws inserted
7: Rear rivet #4-40 H=5.8
with screws inserted
8: Rear rivet #4-40 H=5.8
7. x: Pinrex internal code.

文管中心
2020.11.02
發行章

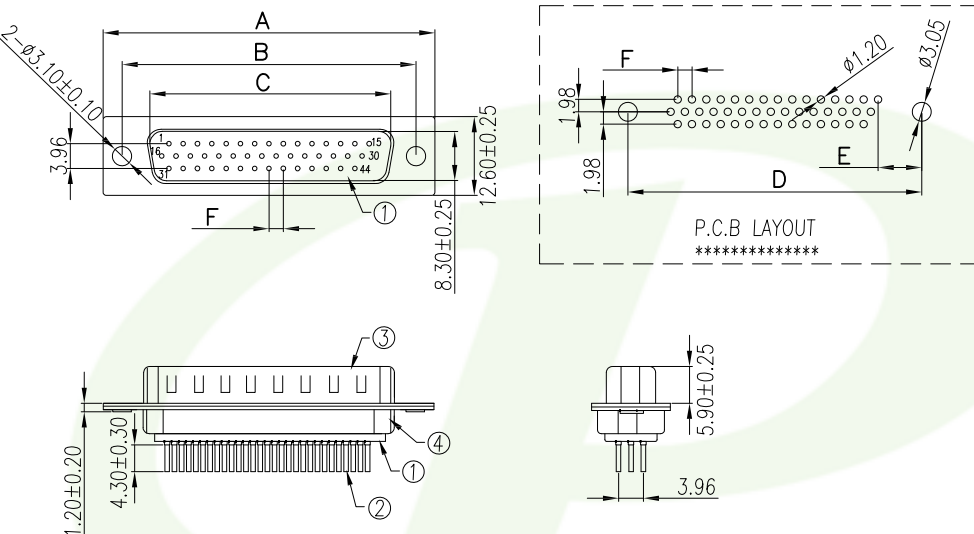

A	15PIN(M)	30.80±0.25	B	25.00±0.25	C	16.92±0.25	D	25.00	E	7.67	F	2.29
	26PIN(M)	39.20±0.25		33.32±0.25		25.25±0.25		33.32		6.99		2.29
	44 PIN(M)	53.05±0.25		47.04±0.25		38.96±0.25		47.04		6.99		2.29
	62PIN(M)	69.40±0.25		63.50±0.25		55.42±0.25		63.50		7.07		2.41

A	Front rivet	B	Rear rivet(3.2MM)	C	Rear rivet boardlock	D	Rear rivet(4.0MM)

9	4.0 Nut	2	Brass	H4.75*5.5	80u"min Nickel Plated
8	Hex Screw	2	Brass	H5*10	80u"min. Nickel Plated
7	Boardlock NUT	2	Brass	H4.75*11.5	80u"min. Tin Plated
6	8.0 Nut	2	Brass	H4.75*8.0	80u"min. Nickel Plated
5	3B Nut	2	Brass	H4.75*4.75	80u"min. Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	80u"min. Tin/Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	80u"min. Nickel/Tin Plated
2	Contact	15~62	Brass	T=0.20mm	Contact area: Gold Plated over 40u"Nickel min. Solder area: 80u"min. Tin Plated over 40u"Nickel min.
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks&Thickness	Finish

				TOLERANCE				OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
				.0 =±.30 .00 =±.20 .000 =±.10 .0000=±. ANG.=±3'	UNITS : mm		DRAWER 姜文慧		CHECK 李劍	D-SUB HDIP XXPIN(M)		
A	RELEASE	2020/10/22			SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 982-21-Cxxxxx		DRAW NO. 982-21-Cxxxxxx(網頁專用圖)
REV.	DESCRIPTION	DATE										