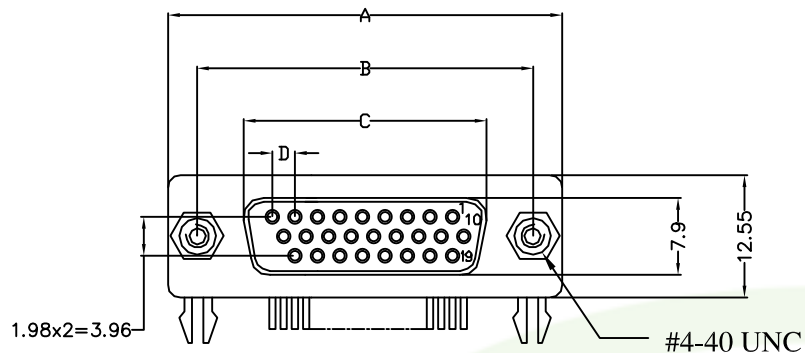


Dimension

Positon	A	B	C	D	G	H
15	30.81	24.99	16.33	2.29	1.145	7.04
26	39.20	33.30	24.70	2.29	1.145	6.88
44	53.05	47.04	38.40	2.29	1.145	6.88
62	69.40	63.50	54.80	2.41	1.205	7.00

MATERIAL

Insulator: Glass-Filled Thermoplastic PBT
UL94V-0 rated
Contact: Brass
Shell: Steel 100u" Tin Over 50u" Copper
Clinch Nut: Brass 100u" min Nickel Plated
Boardlock: Brass 100u" min Tin Plated
Screwlock: Brass 100u" min Nickel Plated

Electrical

Contact Resistance: 20 milliohms Max at 1 AMP DC
Insulator Resistance: 1000MΩmin. at 500 VDC
Current Rating: 3 AMP
Volatge Rating: 250 VAC/rms 60Hz
Dielectric Withstanding Voltage:
1000VAC/rms 60Hz for 1 minute


982- $\frac{1}{1}$ $\frac{1}{2}$ - $\frac{D}{3}$ $\frac{xx}{4}$ $\frac{x}{5}$ $\frac{x}{6}$ $\frac{x}{7}$

- 1: Right angle type
- 1: Tray
- C: H.D. Male(GP)
D: H.D. Female(GP)
- No. of contacts (15,26,44,62)
- 0: Black insulator; Boardlock"Z", Selective
1: Black insulator; Boardlock"Z", Gold flash
- 1: Jack screws inserted
2: Rivet
3: Rivet & Jack screws attached
4: Rivet & Jack screws inserted
7: x: Pinrex internal code.

文管中心
2020.10.22
發行章

TOLERANCE

.0 =±.30
.00 =±.15
.000 =±.XXX
.0000=±.
ANG.=±3'



SCALE NONE
SIZE A4

OLD PART NO.

DRAWER 麦文慧

SHEET 1 OF 1
REV. A

CHECK 李剑

APP'D 李剑

TITLE

D-SUB H.D. RIGHT ANGLE TYPE

NEW PART NO.
982-11-Dxxxxx



頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.
982-11-Dxxxxx(網頁專用圖)

REV. A RELEASE DESCRIPTION 2020/10/21 DATE