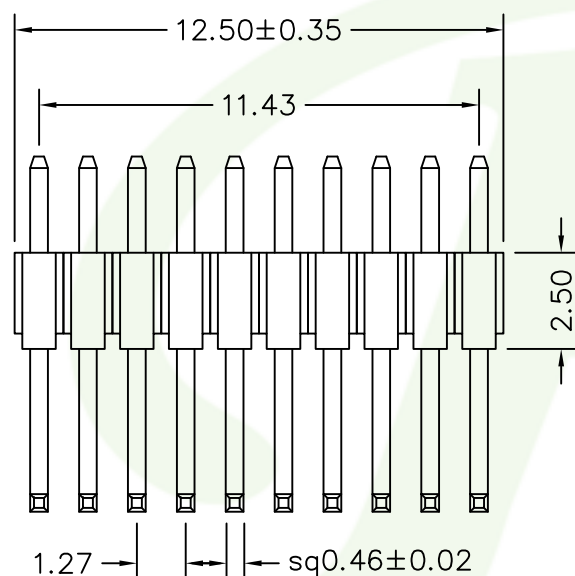
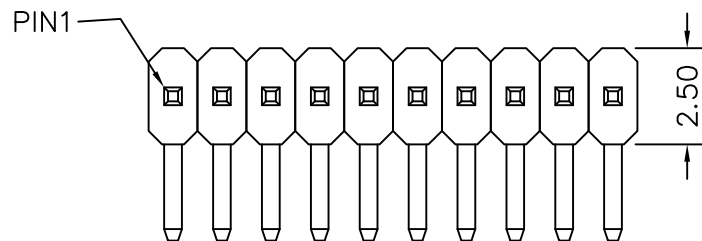


Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V


Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

241-x 6- xx x x xx
1 2 3 4 5 6

1. 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
2. 1: Single row
Plastic Height=1.7mm
- 6: Single row
Plastic Height=2.5mm
- A: Single row
Plastic Height=1.0mm
3. No. of contacts per row
4. G: Gold flash
- T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.



			TOLERANCE		 UNITS : mm	OLD PART NO.		TITLE PIN HEADER 1.27*2.54mm RIGHT ANGLE TYPE, SINGLE ROW	 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.30	.00 =±.20		DRAWER 姜文慧	CHECK 李创		
			.000 =±.XXX	.0000=±.	SCALE NONE	SHEET 1 OF 1	REV. A	APP'D 李创	NEW PART NO. 241-x6-xxxxxx
A	RELEASE	2020/10/23	ANG.=±3'		SIZE A4				DRAW NO. 241-x6-xxxxxx(網頁專用圖)
REV.	DESCRIPTION	DATE							