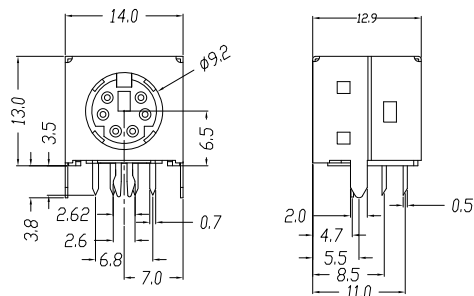


Green
Product

Detail Dimensions



Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC














Rated Voltage And Current: DC12V.2A Max;AC 100V.1A Max .

Dielectric Withstanding Voltage: 250V AC For 1 Minute
Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

文管中心
2020.10.15
發行章

	3 PIN		4 PIN		5 PIN	
						
						

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	PBT G.F.	BLACK	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold:1~3u"; Ni:40~60u";TIN:120u" (100% pure Tin of lead free plating)	x
3	SHIELD	BRASS T:0.3	TIN PLATED Sn:120~200u"	1
4	BOTTOM COVER	PBT G.F.	BLACK	1

				TOLERANCE			OLD PART NO.		TITLE MINI DIN Female R/A PCB Green Product	 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
				.0 =±.30 .00 =±.20 .000 =±.XXX	UNITS : mm		DRAWER 麦文慧	CHECK 李劍			
				.0000=±.	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
A	RELEASE	2020/10/13		ANG.=±3'	NONE	A4	1 OF 1	A	李劍	983-1x-0xxAxx	983-1x-0xxAxx(網頁專用圖)
REV.	DESCRIPTION	DATE									