



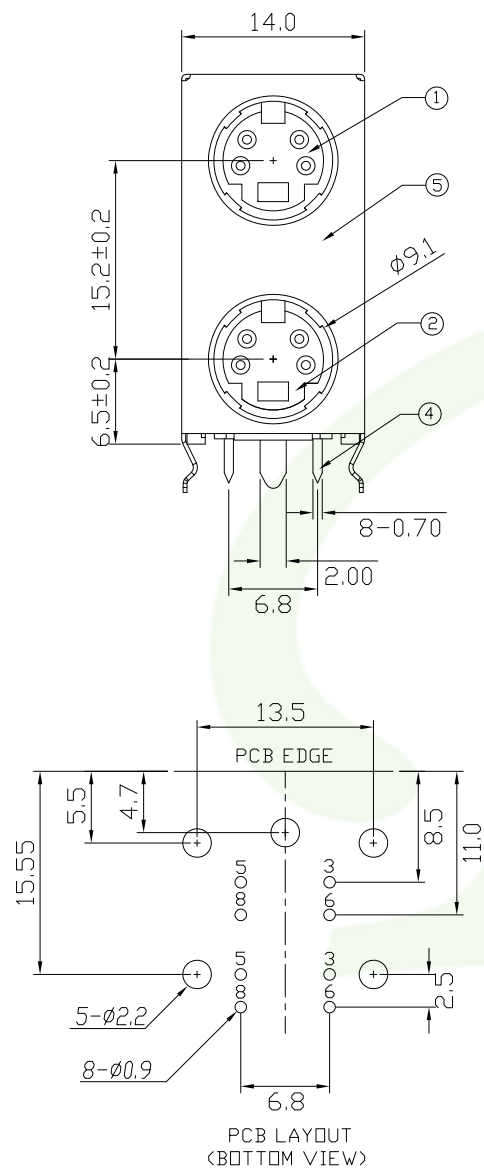

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC

Rated Voltage And Current: DC12V.2A Max;AC 100V.1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.



NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	TOP HOUSING	PBT G.F.	BLACK		1
2	BOTTOM HOUSING	PBT G.F.	BLACK		1
3	BACK COVER	PBT G.F.	BLACK		1
4	CONTACT TERM.	PHOS. BRONZE T:0.2	GOLD/TIN PLATED	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	8
5	FRONT SHIELD	BRASS T:0.3	TIN PLATED	TIN:120~200u"	1
6	BACK SHIELD	BRASS T:0.3	TIN PLATED	TIN:120~200u"	1

			TOLERANCE				OLD PART NO.		TITLE MINI DIN JACK DUAL		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0 =±.25 .00 =±.13 .000 =±.0.05 .0000=±. ANG.=±3°	UNITS : mm	DRAWER 劉偉喬	CHECK 李劍					
A	RELEASE	2020/10/29		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 983-2x-004xxx	DRAW NO. 983-2x-004xxx(網頁專用圖)	
REV.	DESCRIPTION	DATE									