

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

1.1 HOUSING: PBT , WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.

1.2 CONTACTS: PHOSPHOR BRONZE.

2. FINISH:

2.1 CONTACTS: $0.152\mu\text{m}$ [$6\mu''$] ON ENTIRE CONTACT,
1.27mm [50u"] MIN. NICKEL
UNDERPLATED OVERALL.996-A $\frac{2}{1}$ -B3 $\frac{08}{3}$ x x $\frac{x}{4}$ $\frac{x}{5}$

1. 1: Jack



A: Jack (Green Product)

2. 2: Tray

3. 08:10P8C

4. 1:6u"Gold Black Housing

5. Pinrex internal code.

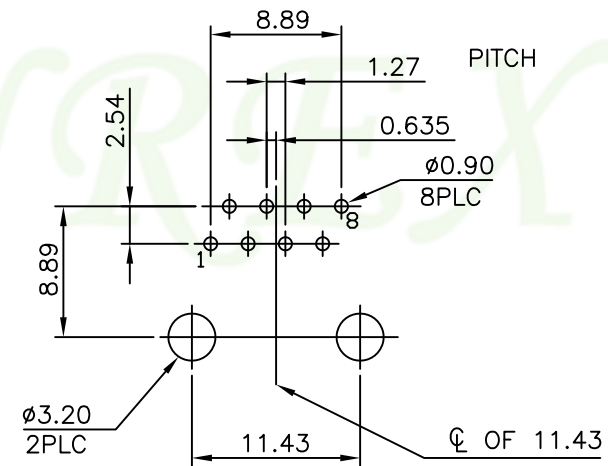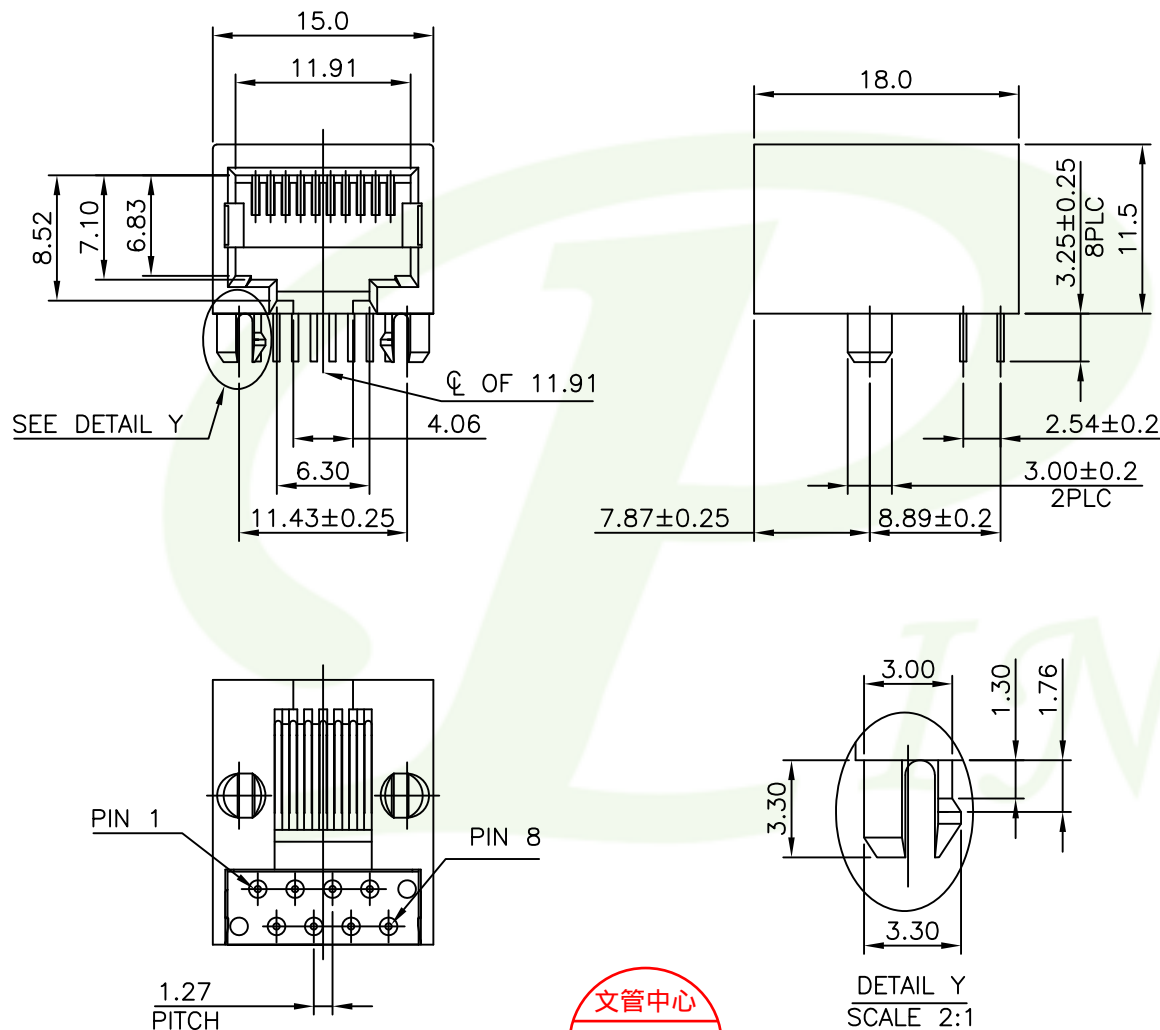

RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
A	RELEASE	2020/12/29	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	
REV.	DESCRIPTION	DATE	NONE	A4	1 OF 1	A	李劍	996-A2-B308xx	DRAW NO. 996-A2-B308xx(網頁專用圖)