

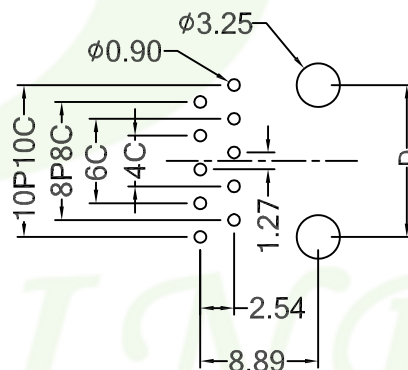
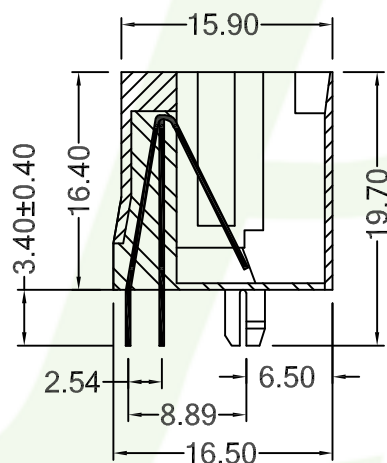
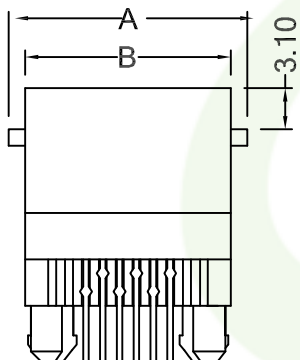





CB LAYOUT / TOP VIEW



Shielded type available in 8P and 10P

Voltage Rating: 125 V
Current Rating: 1.5 A
Contact Resistance: 30 milliohms max.
Insulation Resistance: 500 megaohms min
Dielectric Withstanding Voltage: 1000 V

Housing & Insert: PBT or Nylon 9T, UL94V-0
Conductor: 0.35 × 0.42 mm thickness phosphor bronze,
Plating: Gold plated over nickel on contact area,
Tin plated over nickel on solder area.
Temperature: -40°C to 85°C
Durability: 750 cycles min.

$$996-\frac{A}{1} \frac{2-01}{2} \frac{x}{3} \frac{x}{4} \frac{x}{5} \frac{x}{6}$$

1. 1: Jack
A: Jack (Green Product)
2. 2: Tray
3. No. of position (6/8/10)
4. No. of contacts (2/4/6/8/10)
5. 0: 6u" Gold Black, without panel
1: 6u" Gold Black, with panel
6. Pinrex internal code.

position	contact	A	B	C	D
4P	4C	13.80	11.40	7.90	7.62
6P	2C/4C/6C	15.80	13.45	10.00	10.16
(8P)6P	4C/6C	18.00	15.50	10.00	11.43
8P	4C/6C/8C	18.00	15.50	11.90	11.43
10P	10C	18.00	15.50	11.90	11.43

			TOLERANCE			OLD PART NO.		TITLE MODULAR JACK TOP ENTRY		频锐科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°	UNITS : mm		DRAWER 刘伟青	CHECK 李剑				
A	RELEASE	2020/10/26		SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李剑	NEW PART NO. 996-A2-01xxxx	DRAW NO. 996-A2-01xxxx(網頁專用圖)	
REV.	DESCRIPTION	DATE									