




0.3 Inch

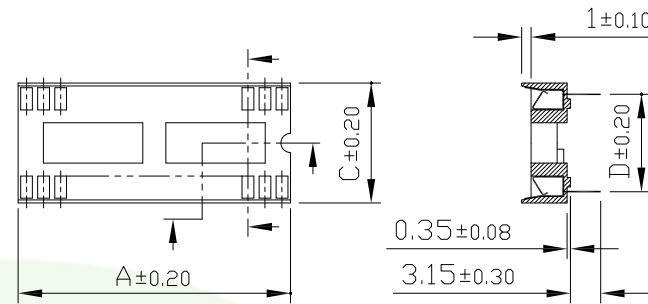

0.4 Inch

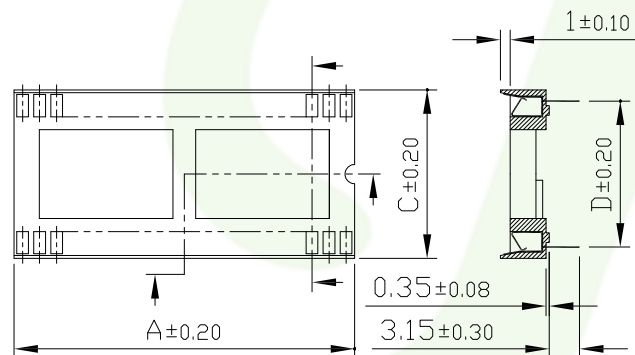

0.6 Inch

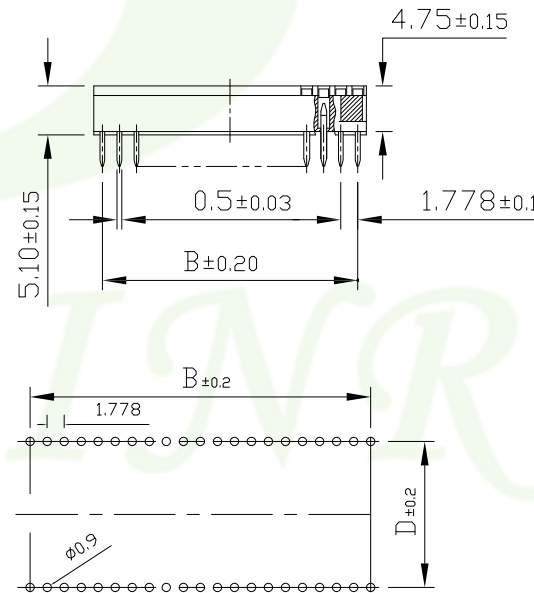

PCB LAYOUT

MATERIAL

Insulator : PBT

Contact Pin : Phosphor Bronze

SPECIFICATIONS:

Current Rating : 1A

Dielectric withstanding Voltage : 1000v RMS/minute

Insulator resistance : 5000 Megohms min.

Contact resistance : 20 milliohms initial

30 milliohms after test.

Operating temperatures : -55°C to 85°C

Insertion force : 340g (12 oz) max.per contact.

Withdrawal force : 80g (2.82 oz) min.per contact

980-3 2 - x xx x xx
1 2 3 4 5

1. 0: Tray
- 2: Tube
2. 3: 0.3(16,20,22,24,W/O Bar)
- 4: 0.4(24,28,30,32,With Bar)
- 6: 0.6(40,42,48,52,54,56,58,60,62,64,With Bar)
3. No. of contacts
4. 0: Without Bar
- 1: With Bar
5. Pinrex internal code.

Inch	CKT	A±0.20	B±0.20	C±0.20	D±0.20
0.3	16	14.22	12.45	10.10	7.62
	20	17.78	16.00		
	22	19.56	17.78		
	24	21.34	19.56		
0.4	CKT	A±0.20	B±0.20	C±0.20	D±0.20
	24	21.34	19.56	12.65	10.16
	28	24.89	23.11		
	30	26.67	24.89		
	32	28.45	26.67		
0.6	CKT	A±0.20	B±0.20	C±0.20	D±0.20
	40	35.56	33.78	17.70	15.24
	42	37.34	35.56		
	48	42.67	40.89		
	52	46.23	44.45		
	54	48.01	46.23		
	56	49.78	48.01		
	58	51.56	49.78		
	60	53.34	51.56		
	62	55.12	53.34		
	64	56.90	55.12		

文管中心
2020.11.05
發行章

REV.	DESCRIPTION	DATE	TOLERANCE	UNITS : mm	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
C	UPDATE	2020/11/04	.0 =±.30	⌀	NONE	A4	1 OF 1	C	李剑	980-32-xxxxxx	980-32-xxxxxx(C版)
B	DIP 3.15	2003/07/10	.00 =±.20								
A	RELEASE	2003/07/09	.000 =±.XXX								
			.0000 =±.								
			ANG.=±3'								

OLD PART NO.

TITLE

STAMPED PIN IC SOCKET
PITCH 1.778mm

DRAWER 麦文慧

CHECK 李剑

SHEET 1 OF 1

APP'D 李剑

NEW PART NO. 980-32-xxxxxx



频锐科技股份有限公司
PINREX ENTERPRISE CO., LTD