

MATERIAL:

INSULATOR : PPS,UL 94V-0

Contact material:phosphor bronze

Contact Platred : tin

SPECIFICATIONS:

Temperature range:-50°C to 105°C

CURRENT Rating :1 AMP

Durability:5 cycles (Min)



Contact resistance:30 Milliohms (Max)

Insulation Resistance :1000 Megohms (Min)


Withstanding Voltage: AC 600 V/min

981-2 x- xx x x x x
1 2 3 4 5 6 7


- 2: SMT
- 2: Tube
- No. of contacts
- 4: Brown Insulator (Green Product)
- 0: Without stand off
1: With stand off
- 0: Tin plated
- Pinrex internal code.

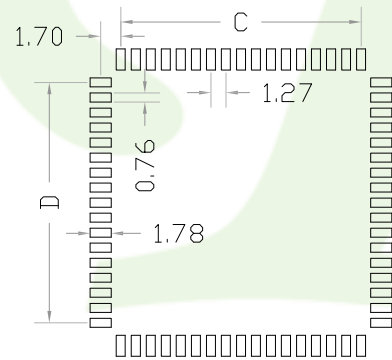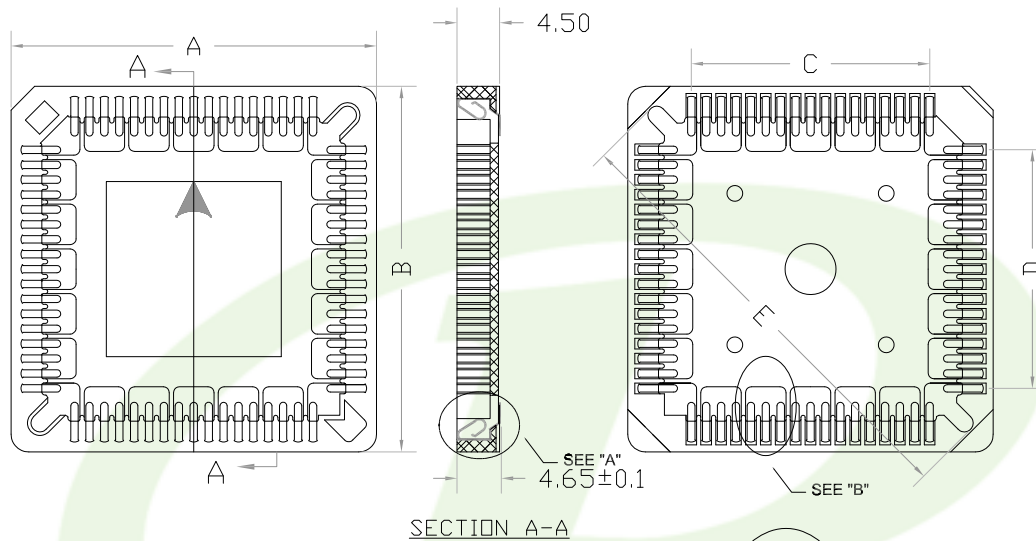

P.C.B LAYOUT



MAX0.18



NO. OF CONTACT	A±0.2	B±0.2	C±0.1	D±0.1	E±0.2
20	15.66	15.66	5.08	5.08	17.28
28	18.20	18.20	7.62	7.62	20.87
32	18.20	20.74	7.62	10.16	23.15
44	23.28	23.28	12.70	12.70	28.05
52	25.82	25.82	15.24	15.24	31.65
68	30.90	30.90	20.32	20.32	38.83
84	35.98	35.98	25.40	25.40	46.00

			TOLERANCE			OLD PART NO.		TITLE		頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30		DRAWER	CHECK			
			.00	=±.20		SCALE	SIZE			
			.000	=±.XXX		NONE	A4			
			.0000=±.							
			ANG.=±3'							
A	RELEASE	2020/11/13				SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE				1 OF 1	A	李劍	981-2x-xxxxxx	981-2x-xxxxxx(網頁專用圖)