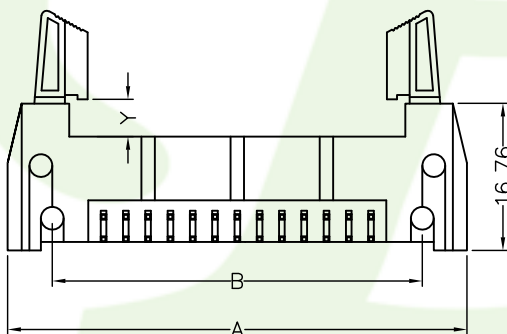
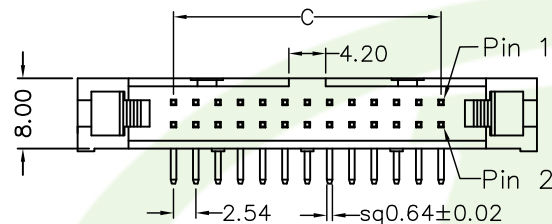
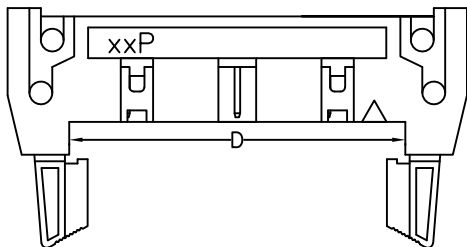


50P (含50P) 以下為一個窗口  
60P (含60P) 以上為三個窗口

## MATERIAL

Contact Pin : Brass

## SPECIFICATION

Current Rate : 1 AMP

Dielectric voltage: 500V AC for one minute

Insulation Resistance : 1000MΩMin.

Contact Resistance : 10mΩMax.

Operation Temperature : -55°C to + 105°C


51G-x 0-xx G B 02  
1 2 3 4 5

1. 7: Green Product  
8: Green Product
2. No. of contacts
3. G: Gold flash  
T: Tin plated
4. B: Black Insulator
5. 02: Short ejector



| No. of pins | A      | B     | C     | D     |
|-------------|--------|-------|-------|-------|
| 10          | 31.87  | 21.70 | 10.16 | 17.90 |
| 14          | 36.95  | 26.88 | 15.24 | 22.95 |
| 16          | 39.48  | 29.27 | 17.78 | 25.50 |
| 20          | 44.62  | 34.50 | 22.86 | 30.58 |
| 24          | 49.67  | 39.50 | 27.94 | 35.70 |
| 26          | 52.23  | 42.05 | 30.48 | 38.25 |
| 30          | 57.30  | 47.20 | 35.56 | 43.35 |
| 34          | 62.38  | 52.15 | 40.64 | 48.40 |
| 40          | 69.95  | 59.90 | 48.26 | 56.05 |
| 50          | 82.70  | 72.55 | 60.96 | 68.70 |
| 60          | 95.45  | 85.25 | 73.66 | 81.50 |
| 64          | 100.60 | 90.35 | 78.74 | 86.40 |

| TYPE | Short |
|------|-------|
| X    | 10.80 |
| Y    | 4.50  |

|      |             |            |  |             |  |                                                                                                   |              |                            |                                                    |                                                                                                                             |
|------|-------------|------------|--|-------------|--|---------------------------------------------------------------------------------------------------|--------------|----------------------------|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|      |             |            |  | TOLERANCE   |  | <br>UNITS : mm | OLD PART NO. |                            | TITLE<br>EJECTOR HEADER 2.54mm<br>RIGHT ANGLE TYPE |  頻銳科技股份有限公司<br>PINREX TECHNOLOGY CORP. |
|      |             |            |  | .0 =±.30    |  |                                                                                                   | DRAWER 姜文慧   | CHECK 李劍                   |                                                    |                                                                                                                             |
|      |             |            |  | .00 =±.20   |  |                                                                                                   | SCALE NONE   | SIZE A4                    |                                                    |                                                                                                                             |
|      |             |            |  | .000 =±.XXX |  |                                                                                                   | SHEET 1 OF 1 | REV. A                     |                                                    |                                                                                                                             |
| A    | RELEASE     | 2021/07/16 |  | .0000=±.    |  |                                                                                                   | APP'D 李劍     | NEW PART NO. 51G-x0-xxGB02 | DRAW NO. 51G-x0-xxGB02(Short Latch)                |                                                                                                                             |
| REV. | DESCRIPTION | DATE       |  | ANG.=±5'    |  |                                                                                                   |              |                            |                                                    |                                                                                                                             |