

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0



SPECIFICATION

CURRENT RATING : 1 AMPS

WITHSTANDING VOLTAGE : 500V AC(1min)


INSULATION RESISTANCE : 1000M OHMS MIN.

CONTACT RESISTANCE: 20M OHMS MAX

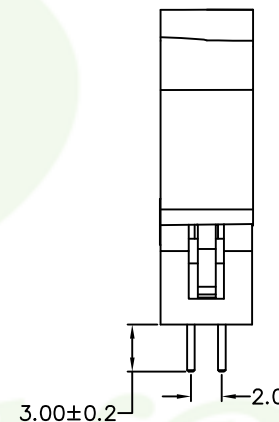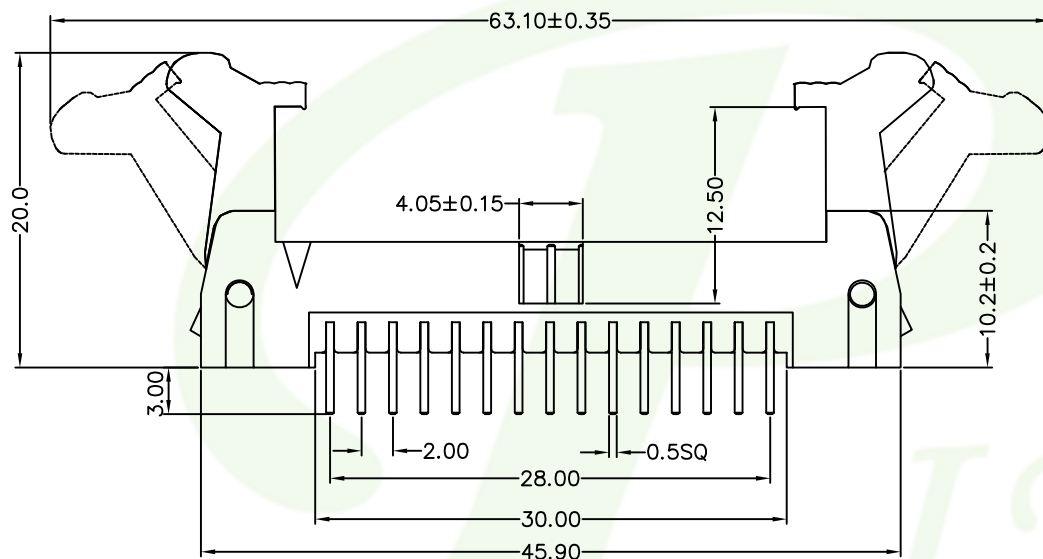

52F-x 0-xx x x 14
1 2 3 4 5

- 7: Green Product
- 9: Green Product High Temp
- No. of contacts
- G: Gold flash
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code.

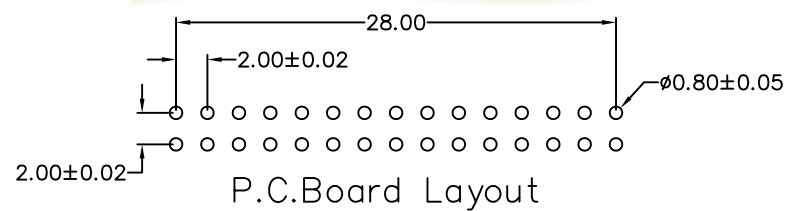

			TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3'	 UNITS : mm	OLD PART NO.		TITLE	 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.			
					DRAWER 姜文慧	CHECK 李劍			EJECTOR HEADER 2.0mm DUAL ROW,STRAIGHT TYPE		
A	RELEASE	2020/11/09			SCALE NONE	SIZE A4	SHEET 1 OF 1			REV. A	APP'D 李劍
REV.	DESCRIPTION	DATE									52F-x0-xxxx14
								DRAW NO.			
								52F-x0-xxxx14(網頁專用圖)			