
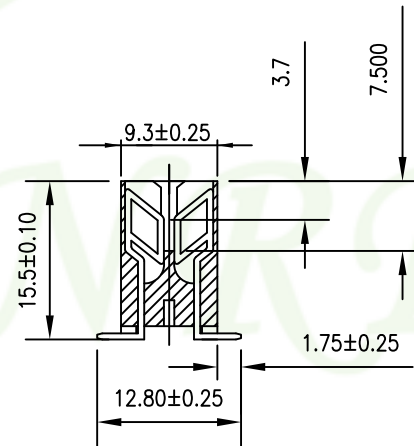


- Insulator: Glass-Fiber NY-9T(UL94V-0)
- Contact: Brass
- Plating: Gold Plating Over Nickel.

- Insulation Resistance: 5000 M Ω min at 500 VDC
- Dielectric Withstanding Volatge: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m Ω max
- Operating Temperature: -55 $^{\circ}$ c to 105 $^{\circ}$ c
- Insartion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

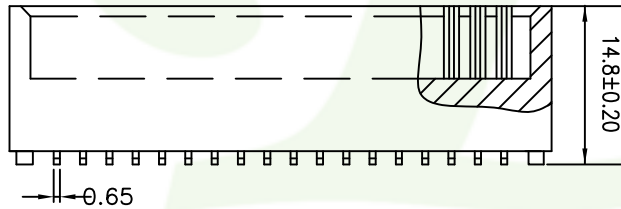

文管中心
2021.01.25
發行章

			TOLERANCE				OLD PART NO.		TITLE		 频锐科技股份有限公司	
			.0 =±.30		UNITS : mm		DRAWER 麦文慧		2.54MM CARD EDGE SMT		PINREX TECHNOLOGY CORP.	
			.00 =±.20				CHECK 李劍					
			.000 =±.XXX									
A RELEASE			2021/01/05		SCALE NONE		SHEET 1 OF 1		REV. A		DRAW NO.	
DESCRIPTION			DATE		SIZE A4		APP'D 李劍		NEW PART NO. 986-41-xx52xx		986-41-xx52xx (網頁專用圖)	