
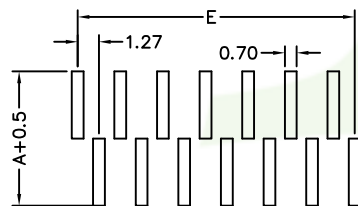
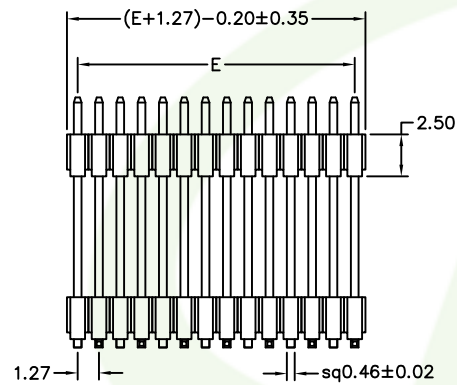





A TYPE

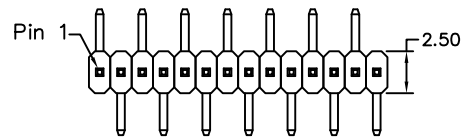

A TYPE

Recommended P.C.B Layout

B TYPE

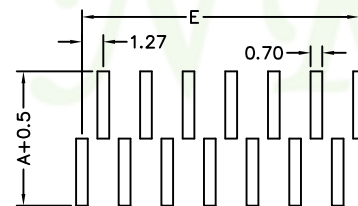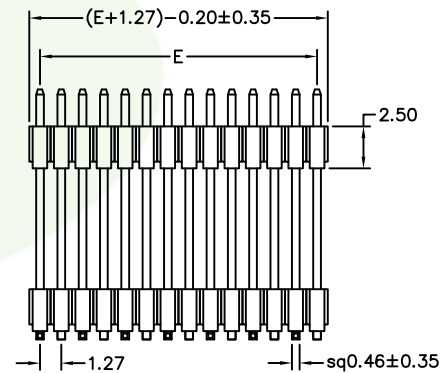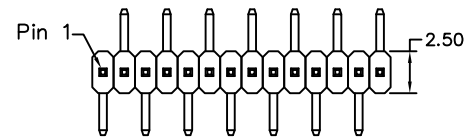

B TYPE

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA


Dielectric Voltage : AC 500V for one minute

$$245-x \begin{matrix} 6- \\ 1 \end{matrix} \begin{matrix} xx \\ 2 \end{matrix} \begin{matrix} x \\ 3 \end{matrix} \begin{matrix} x \\ 4 \end{matrix} \begin{matrix} xx \\ 5 \end{matrix} \begin{matrix} \\ 6 \end{matrix}$$

1. 7: Green Product
- 9: Green Product High Temp
2. 1: Single row
Plastic Height=1.7mm
- 6: Single row
Plastic Height=2.5mm
3. No. of contacts per row
4. G: Gold flash
T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.

TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3'



UNITS : mm

SCALE NONE
SIZE A4

OLD PART NO.

DRAWER 麦文慧

SHEET 1 OF 1

REV. A

CHECK 李剑

APP'D 李剑

TITLE

PIN HEADER 1.27*2.54mm
SMT S/T TYPE, SINGLE ROW
DUAL INSULATORS

NEW PART NO.

245-x6-xxxxxx



頻銳科技股份有限公司

PINREX TECHNOLOGY CORP.

DRAW NO.

245-x6-xxxxxx(網頁專用圖)

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/03