

*Material:

Insulator: PBT+Glass Fiber (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold or Tin over Nickel Plated.

All material accord with ROHS.

*Specification:

Withstanding Voltage: AC 500V for 1 Minute.


Insulation Resistance: 100 MΩ Min. at DC 500V.

Contact Resistance: 1 Ω Max..

Operating Temperature: -40℃ --- +105℃.

977- 2 1 - xx x x x x
1 1 2 3 4 5 6

1. 2: Pitch=2.0
2. No. of contacts
3. 3: With Bump
4. Without Bump
- 3: With Strain relief
- 2: Without Strain relief
- 0: Selective
6. Pinrex internal code.

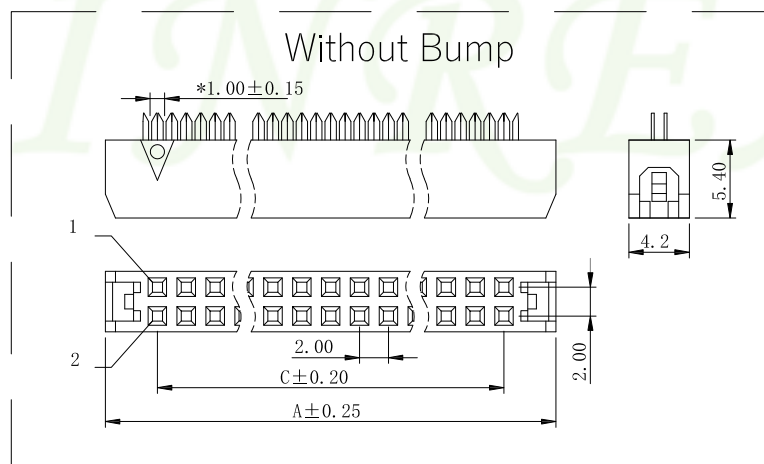

Pos.	Dim. A	Dim. B	Dim. C
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
28	33.20	27.00	26.00
30	35.20	29.00	28.00
40	45.20	39.00	38.00
44	49.20	43.00	42.00
48	53.20	47.00	46.00
50	55.20	49.00	48.00
60	65.20	59.00	58.00
64	69.20	63.00	62.00
68	73.20	67.00	66.00



			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE	DRAW NO.
A	RELEASE	2020/11/13	.0	±.30		DRAWER	CHECK		
REV.	DESCRIPTION	DATE	.00	±.20	SCALE	SIZE	SHEET	REV.	APP'D
			.000	±.XXX	NONE	A4	1 OF 1	A	李劍
			.0000	±.					
			ANG.=±3'						
						NEW PART NO.		DRAW NO.	
						977-21-xxxxxx		977-21-xxxxxx(網頁專用圖)	

頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.