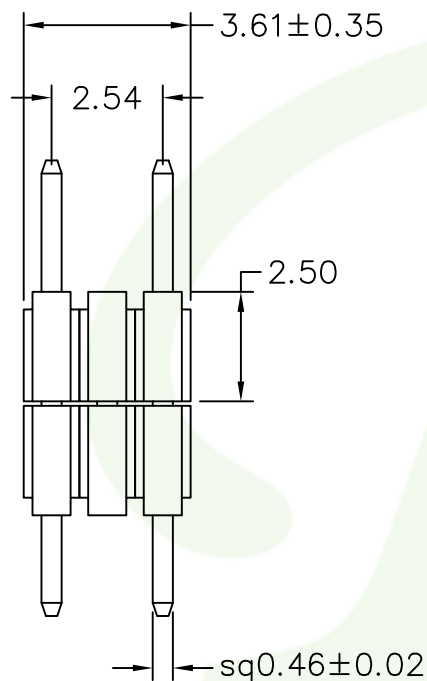
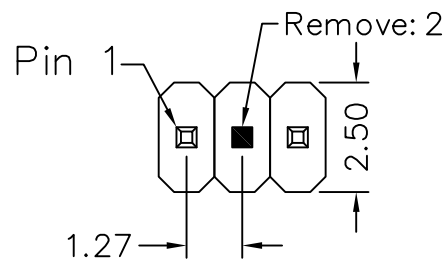


Recommended P.C.B Layout

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

24M-x 6- xx x x xx
1 2 3 4 5 6

- 7: Green Product
9: Green Product High Temp
- 1: Single row
Plastic Height=1.7mm
6: Single row
Plastic Height=2.5mm
- No. of contacts
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.



					TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3'		 UNITS : mm		OLD PART NO. DRAWER 姜文慧 CHECK 李劍			TITLE PIN HEADER 1.27*2.54mm STRAIGHT TYPE, SINGLE ROW DUAL INSULATORS			 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.										
A RELEASE			2020/10/23				SCALE NONE		SIZE A4		SHEET 1 OF 1			REV. A			APP'D 李劍			NEW PART NO.			DRAW NO.		
DESCRIPTION			DATE																	24M-x6-xxxxxx			24M-x6-xxxxxx(網頁專用圖)		