
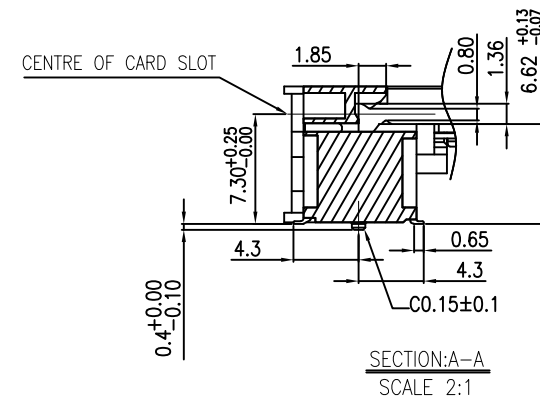
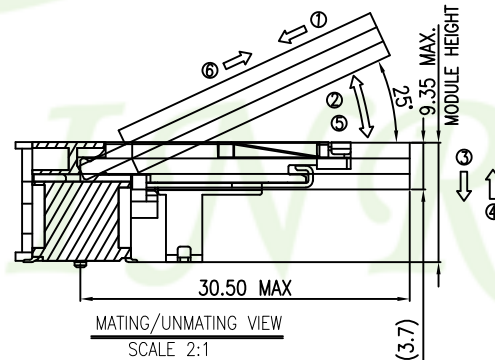
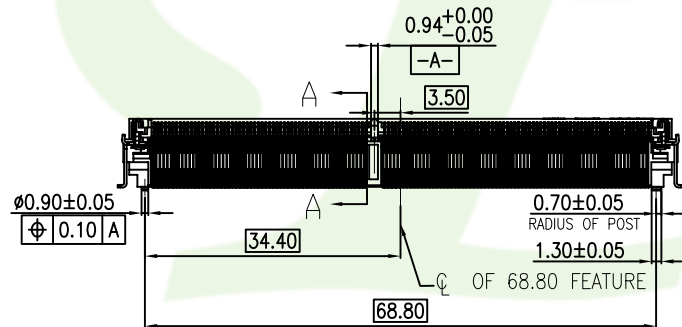


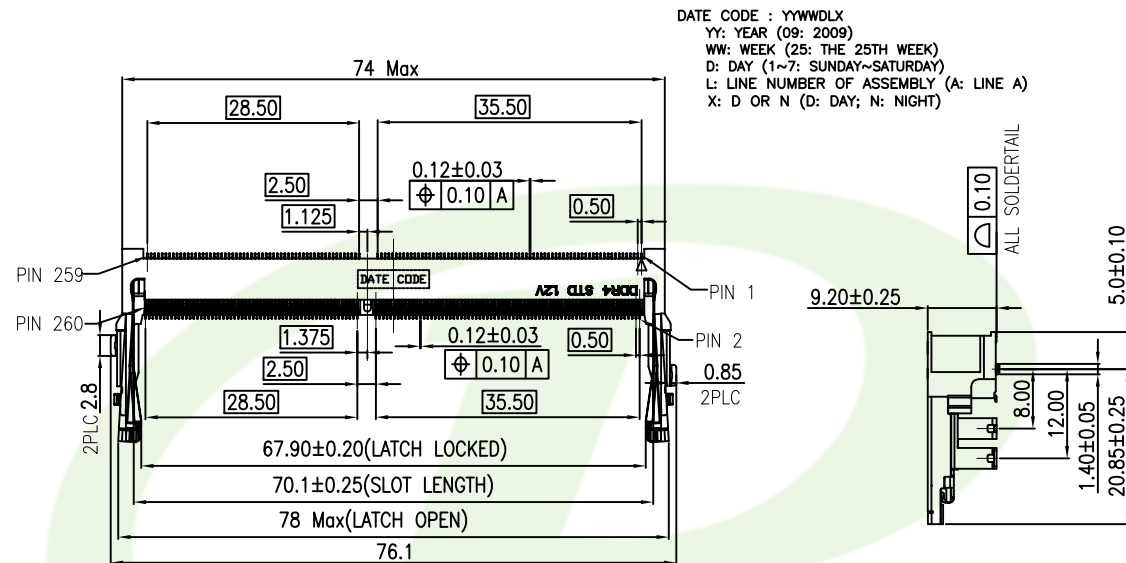

NOTES:

1.MATERIAL:

HOUSING: LCP, UL94V-0, Black
CONTACT: PHOSPHOR BRONZE
LATCH: STAINLESS

2.FINISH:

CONTACT:

CONTACT AREA: G/F GOLD PLATED
SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED.

LATCH:

SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED.

3.SPECIFICATION:

CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 25V AC
DIELECTRIC WITHSTANDING: 125V AC FOR 1 MINUTE
CONTACT RESISTANCE: 60mΩ Max.
INSULATION RESISTANCE: 500MΩ Min
OPERATING TEMPERATURE: -40°C to +85°C
DURABILITY: 25 CYCLES MIN.



REV.	DESCRIPTION	DATE	TOLERANCE	UNITS : mm	OLD PART NO.	TITLE	DRAW NO.
A	RELEASE	2021/01/13	.0 = ±.30 .00 = ±.20 .000 = ±.XXX .0000 = ±. ANG. = ±3°	SCALE NONE SIZE A4	DRAWER 麦文慧 CHECK 李创 SHEET 1 OF 1 REV. A APP'D 李创	SO DIMM DDR4 R/A 260 Pin Standard Type H:9.2mm NEW PART NO. 970-81-2607Bx	頻銳科技股份有限公司 PINREX TECHNOLOGY CORP. 970-81-2607Bx(網頁專用圖)

