
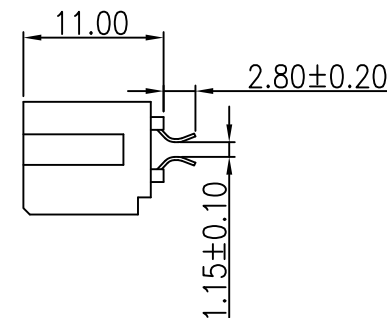
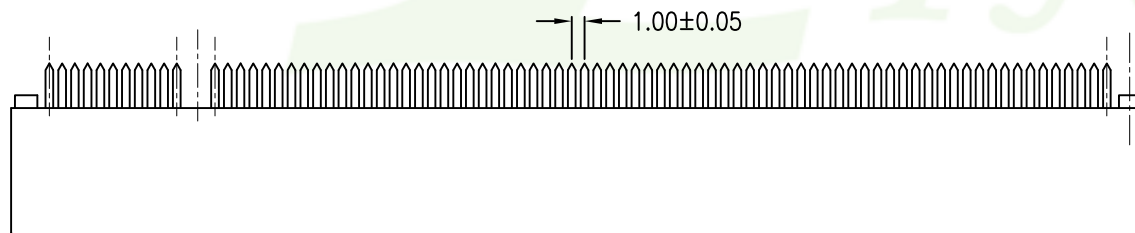
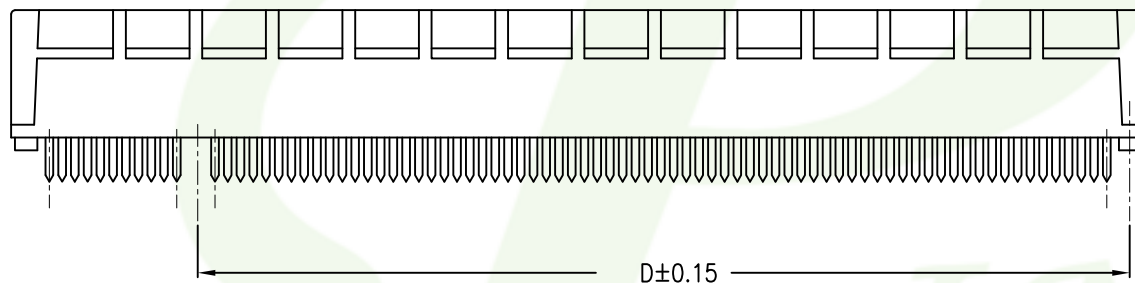


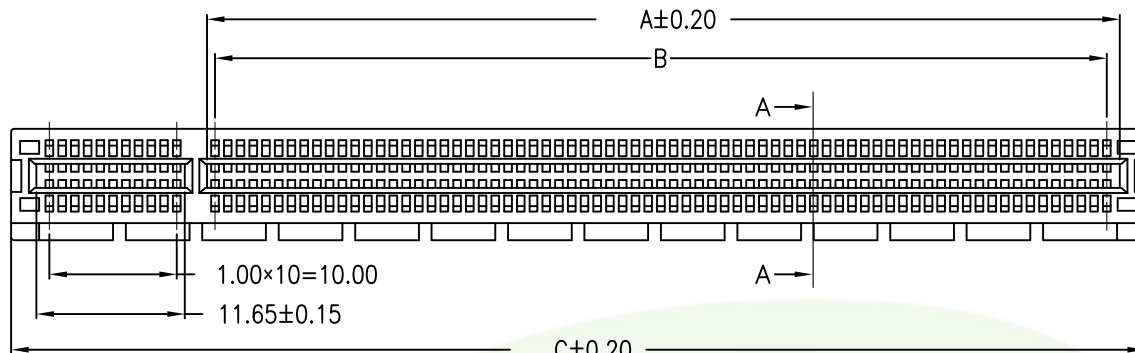

Note:

1:Electvical Performance

1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.

1.2.Contadt Resistance:30mΩ Max

1.3.linsulation Resistance:1000MΩ Min

2.Mechanical Performance.

2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.

2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.


2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.

3.Material & Finish:

3.1.Housing: Glass Filled Nylon 66, Black.

3.2.Contact Plating: Tin Plating At Solder Tail Area;
Gold Plating At Mating Area, All Over Nickel Plating.

4.Environmental:Operating Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$



SECTION:A-A



PIN	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

				TOLERANCE				OLD PART NO.		TITLE	
				.0 = ± 0.30						1.0mm PCI Express DIP	
				.00 = ± 0.20				DRAWER 姜文慧			
				.000 = ± 0.000				CHECK 李剑			
A		RELEASE		2021/01/05				SHEET 1 OF 1		NEW PART NO. 986-14-xxxxxx	
REV.		DESCRIPTION		DATE				APP'D 李剑		DRAW NO. 986-14-xxxxxx (網頁專用圖)	