


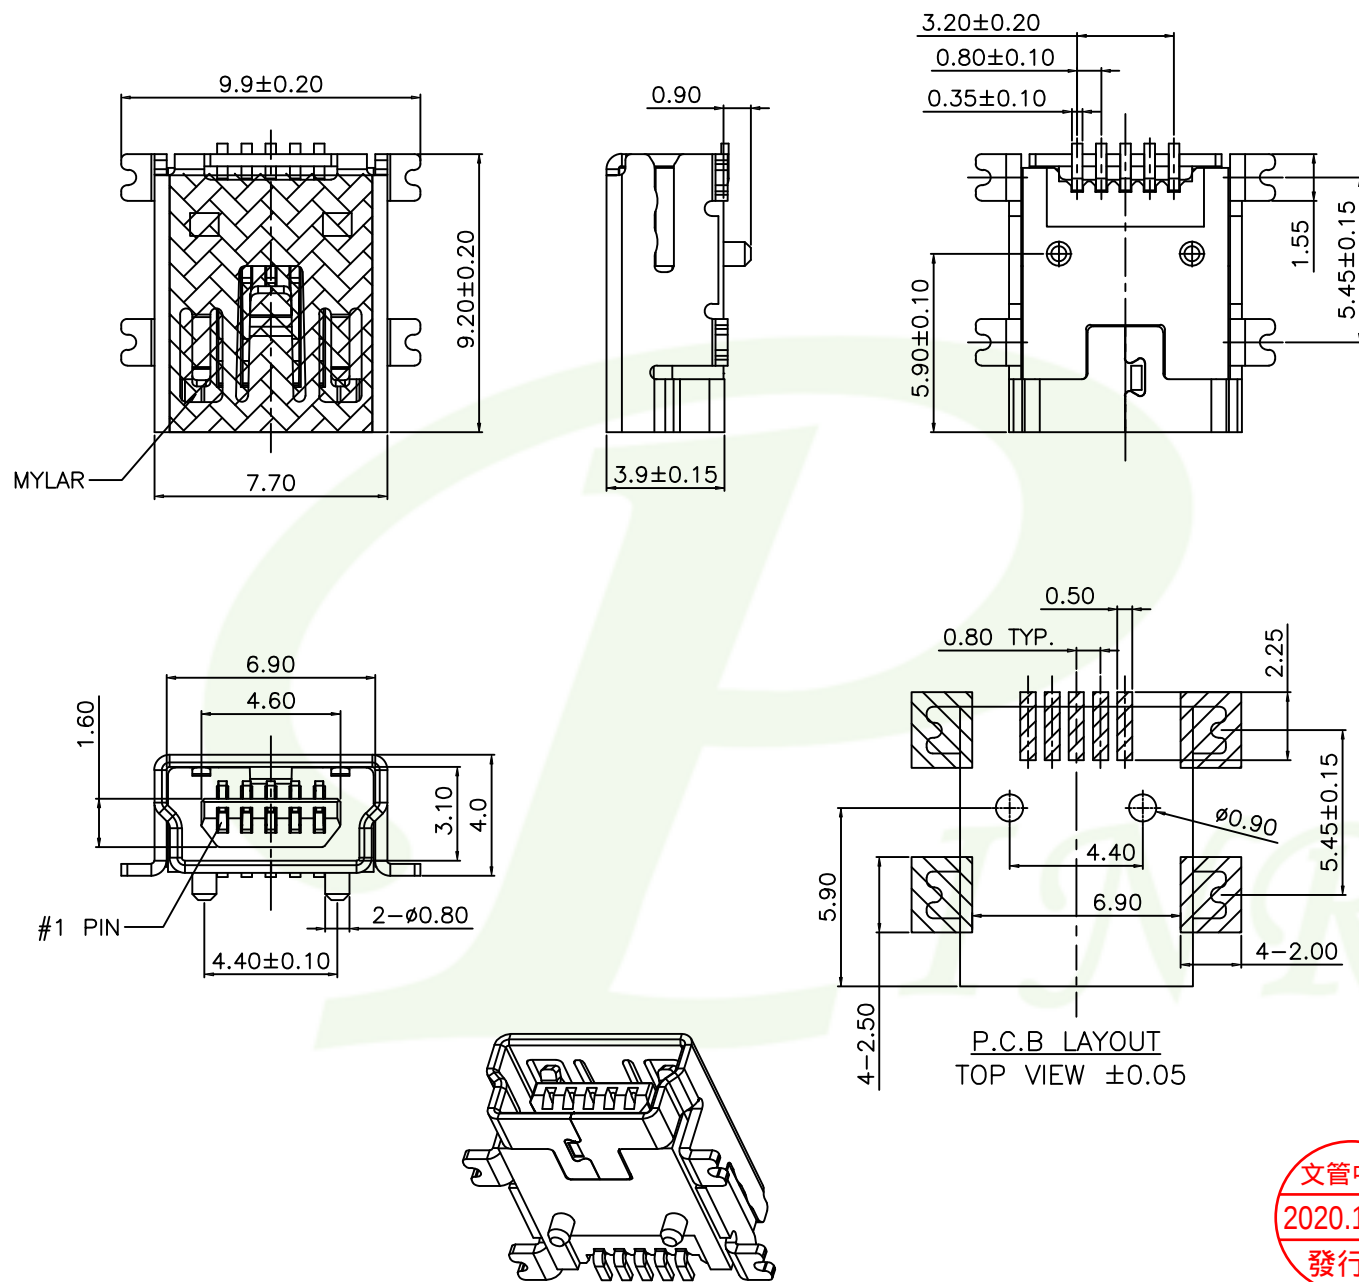

1. Materials:

Housing: Hi-Temp Plastic (UL 94V-0)

Shell: Copper Alloy, Nickel Plating

Terminal: Copper Alloy, Gold Plated On Contact Area,
Tin Plated On Solder tails.

2. Specification:

Current Rating: 1 AMP Max.

Dielectric Withstanding: 100V AC For One Minute

Contact Resistance: 50m Ohms Max.

Insulation Resistance: 100M Ohms Min. At DC 100V



			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
REV.	DESCRIPTION	DATE	.0	.00		DRAWER	CHECK	MINI USB 05PIN(F) SMT R/A	NEW PART NO.	
A	RELEASE	2020/12/25	±.25	±.20	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	984-3x-8052xx
			±.000	±.XXX						82020.12.25
			±.0000	±.						發行章
			ANG. = ±3°							