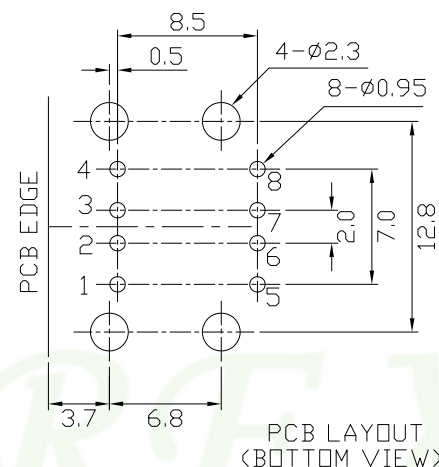
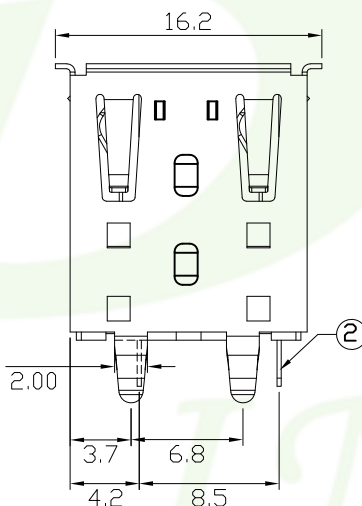
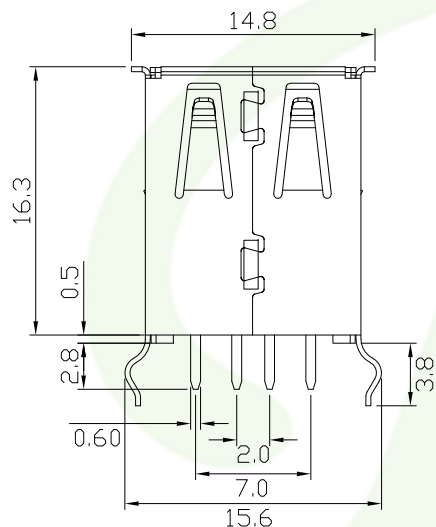
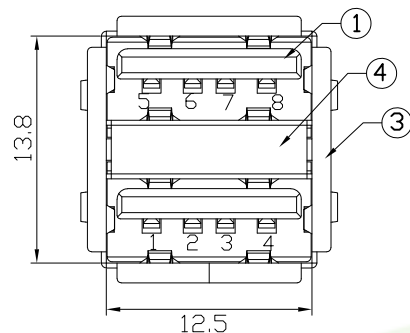


Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:750V AC (rms) for 1 Minute(Rev. 1.1).

Durability (Life Test): 1500 Cycles.

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE	1	
2	PIN TERM.	PHOS. BRONZE,T:0.25	GOLD-TIN PLATED	8	Contact:Gold flash Solder area:Tin plated
3	SHELL	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
4	SPRING CLIP	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
5	SPEACER	P.E.	NATURAL	2	

			TOLERANCE		UNITS : mm	OLD PART NO.		TITLE	DRAW NO.
			.0	=±.30		DRAWER	CHECK		
			.00	=±.20		刘伟青	李剑	DUAL USB A TYPE VERTICAL	P 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.000	=±.XXX		REV. A	APP'D 李剑		
A	RELEASE	2020/10/27			SCALE NONE	SIZE A4	SHEET 1 OF 1	NEW PART NO. 984-1x-6081xx	DRAW NO. 984-1x-6081xx(網頁專用圖)
REV.	DESCRIPTION	DATE	.0000=±.ANG.=±3°						