
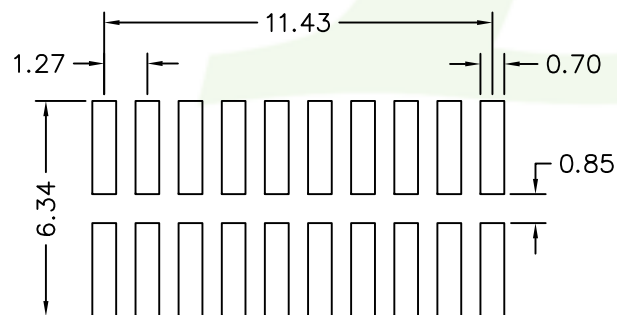
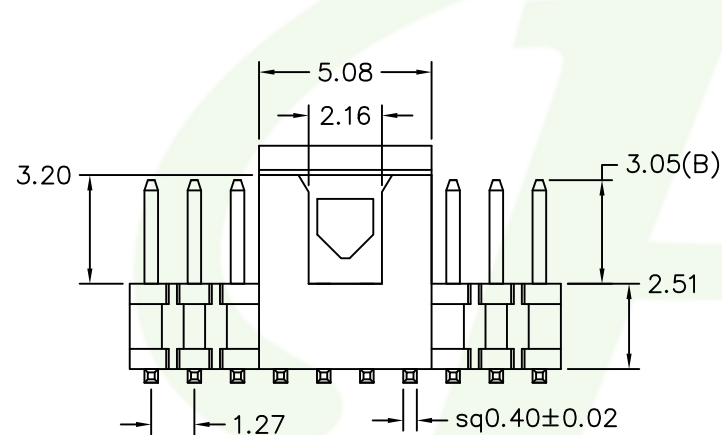


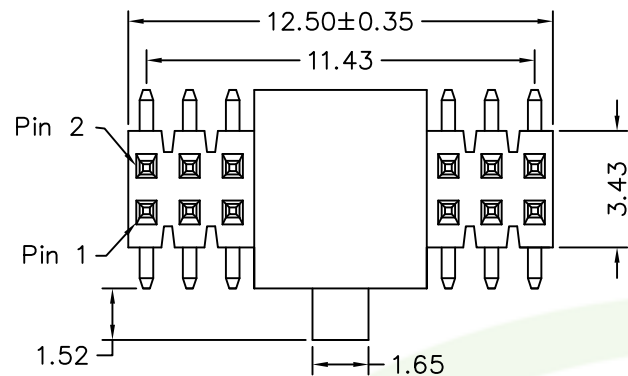

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V


Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

232-x B- $\frac{xx}{1} \frac{x}{2} \frac{x}{3} \frac{x}{4} \frac{xxxx}{5} \frac{xxxx}{6}$

- 7: Green Product
- 9: Green Product High Temp
- 2: Dual rows
Plastic Height=1.0mm
- B: Dual rows
Plastic Height=2.5mm
- No. of contacts per row
- S: Selective(3u"Gold plated,Matte Tin plated)
- B: Black Insulator
- Pinrex internal code.

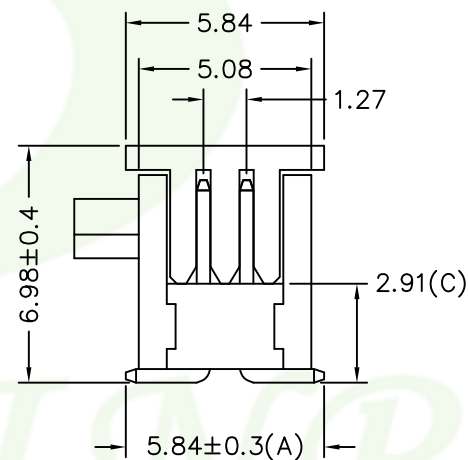

			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30					PIN HEADER 1.27*1.27mm		
			.00	=±.20			DRAWER	麦文慧	SMT S/T TYPE, DUAL ROWS		
			.000	=±.XXX			CHECK	李劍	CAP+T/R		
A	RELEASE	2020/10/23	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	232-xB-xxxxxxxxx	232-xB-xxxxxxxxx(網頁專用圖)