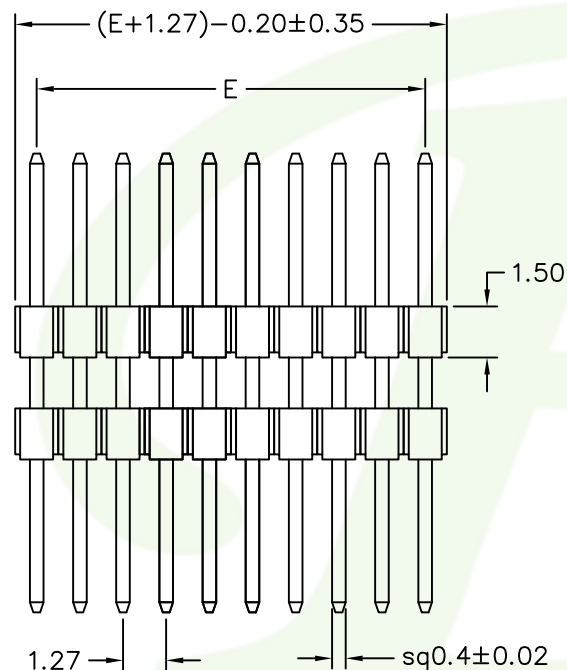



MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

233-x 6- xx x x xx
1 2 3 4 5 6

- 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
Plastic Height=1.0mm
- 6: Single row
Plastic Height=1.5mm
- C: Single row
Plastic Height=1.7mm
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
2	1.27	26	31.75
3	2.54	27	33.02
4	3.81	28	34.29
5	5.08	29	35.56
6	6.35	30	36.83
7	7.62	31	38.10
8	8.89	32	39.37
9	10.16	33	40.64
10	11.43	34	41.91
11	12.70	35	43.18
12	13.97	36	44.45
13	15.24	37	45.72
14	16.51	38	46.99
15	17.78	39	48.26
16	19.05	40	49.53
17	20.32	41	50.80
18	21.59	42	52.07
19	22.86	43	53.34
20	24.13	44	54.61
21	25.40	45	55.88
22	26.67	46	57.15
23	27.94	47	58.42
24	29.21	48	59.69
25	30.48	49	60.96
		50	62.23