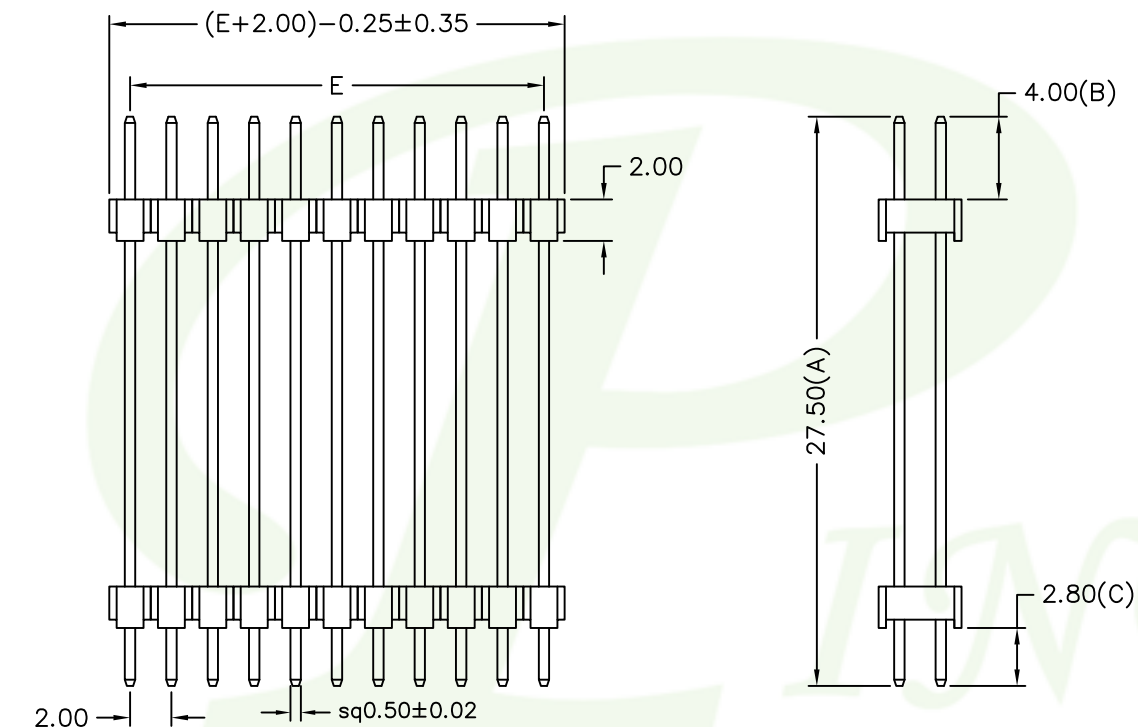


MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

$$\frac{223-x}{1} \quad \frac{7-x}{2} \quad \frac{xx}{3} \quad \frac{x}{4} \quad \frac{x}{5} \quad \frac{xx}{6}$$

1. 9: Green Product High Temp
2. 7: Dual rows
Plastic Height=2.0mm
3. No. of contacts per row
4. G: Gold flash
T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.

POLES	DIM E	POLES	DIM E
		23	44.00
2	2.00	24	46.00
3	4.00	25	48.00
4	6.00	26	50.00
5	8.00	27	52.00
6	10.00	28	54.00
7	12.00	29	56.00
8	14.00	30	58.00
9	16.00	31	60.00
10	18.00	32	62.00
11	20.00	33	64.00
12	22.00	34	66.00
13	24.00	35	68.00
14	26.00	36	70.00
15	28.00	37	72.00
16	30.00	38	74.00
17	32.00	39	76.00
18	34.00	40	78.00
19	36.00	41	80.00
20	38.00	42	82.00
21	40.00	43	84.00
22	42.00	44	86.00

文管中心
2020.11.04
發行章

			TOLERANCE		 UNITS : mm		OLD PART NO.		TITLE PIN HEADER 2.00*2.00mm STRAIGHT STACK, DUAL ROWS		 频锐科技股份有限公司 PINREX TECHNOLOGY CORP.	
			.0 =±.30				DRAWER 姜文慧					
			.00 =±.20									
			.000 =±.XXX									
A	RELEASE	2020/10/26	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.	
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李劍	223-x7-xxxxxxx	223-x7-xxxxxx(網頁專用圖)	