
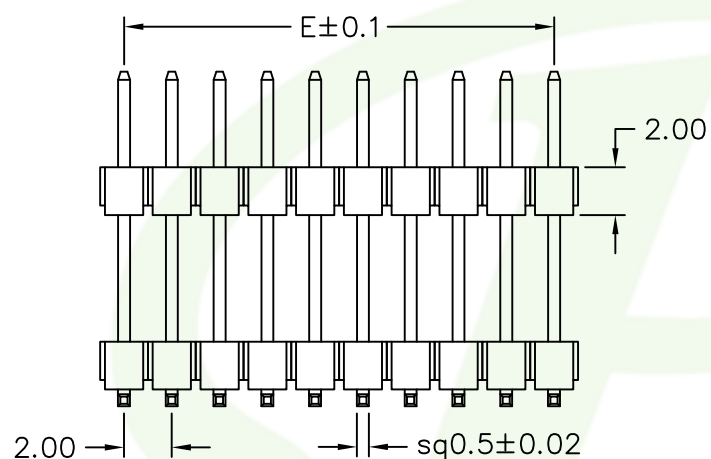
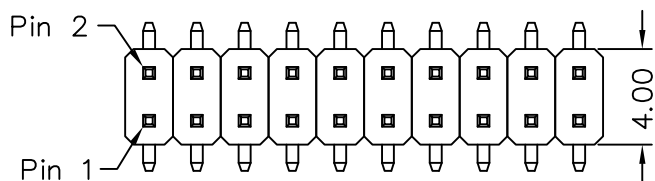


Recommended P.C.B Layout

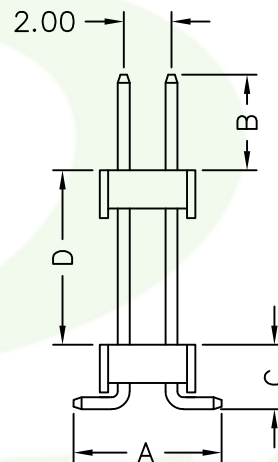

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

225-x 7- xx x x xx
1 2 3 4 5 6

- 5: Normal Parts (30% Glass fiber PBT)
- 7: Green Product (30% Glass fiber PBT)
- 9: Green Product High Temp
- 2: Dual rows
Plastic Height=1.5mm
- 7: Dual rows
Plastic Height=2.0mm
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

If you need other dimensions,
please fill out Dim A/B/C/D or
contact our sales representatives.

文管中心
2020.11.04
發行章

DIM A	DIM B	DIM C	DIM D

POLES	DIM E	POLES	DIM E
2	2.00	23	44.00
3	4.00	24	46.00
4	6.00	25	48.00
5	8.00	26	50.00
6	10.00	27	52.00
7	12.00	28	54.00
8	14.00	29	56.00
9	16.00	30	58.00
10	18.00	31	60.00
11	20.00	32	62.00
12	22.00	33	64.00
13	24.00	34	66.00
14	26.00	35	68.00
15	28.00	36	70.00
16	30.00	37	72.00
17	32.00	38	74.00
18	34.00	39	76.00
19	36.00	40	78.00
20	38.00	41	80.00
21	40.00	42	82.00
22	42.00	43	84.00
		44	86.00
