

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP








Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA


Dielectric Voltage : AC 500V for one minute

226-9 $\frac{x}{1}$ $\frac{x}{2}$ $\frac{xx}{3}$ $\frac{x}{4}$ $\frac{xx}{5}$ $\frac{xx}{6}$

- 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 2, 6: Single row
Plastic Height=2.0mm
- 7: Dual rows
Plastic Height=2.0mm
- 3: No. of contacts per row
- 4: G: Gold flash
S: Selective
T: Tin plated
- 5: B: Black Insulator
- 6: Pinrex internal code.

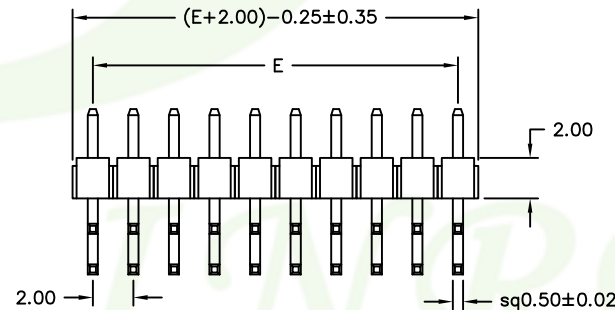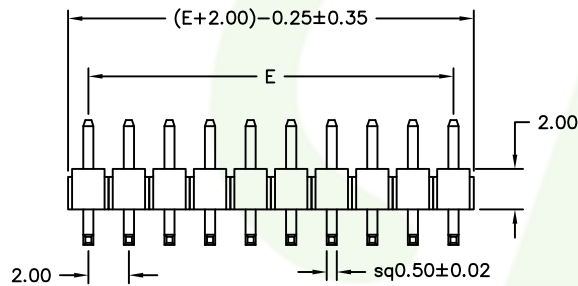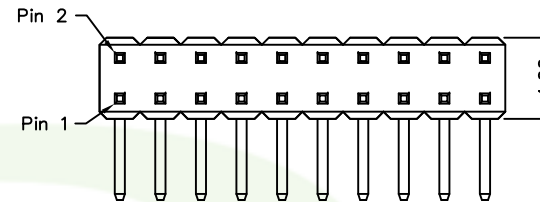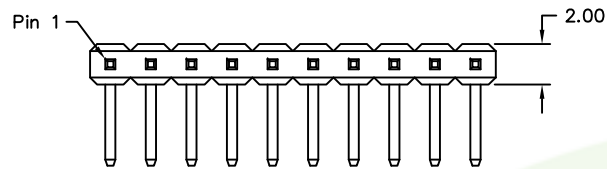

Recommended P.C.B Layout

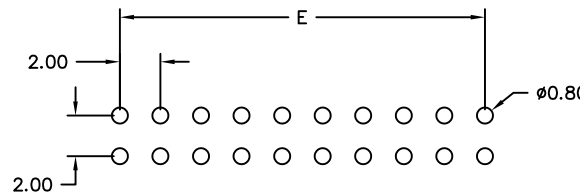

Recommended P.C.B Layout

If you need other dimensions, please fill out Dim A/B/C or contact our sales representatives.

DIM A	DIM B	DIM C


POLES	DIM E	POLES	DIM E
2	2.00	21	40.00
3	4.00	22	42.00
4	6.00	23	44.00
5	8.00	24	46.00
6	10.00	25	48.00
7	12.00	26	50.00
8	14.00	27	52.00
9	16.00	28	54.00
10	18.00	29	56.00
11	20.00	30	58.00
12	22.00	31	60.00
13	24.00	32	62.00
14	26.00	33	64.00
15	28.00	34	66.00
16	30.00	35	68.00
17	32.00	36	70.00
18	34.00	37	72.00
19	36.00	38	74.00
20	38.00	39	76.00
		40	78.00

PINREX 频锐科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO. 226-9x-xxxxxx (網頁專用圖)

TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3°



UNITS : mm

SCALE NONE SIZE A4

OLD PART NO.

DRAWER 麦文慧

SHEET 1 OF 1

REV. A

CHECK 李创

APP'D 李创

TITLE

PIN HEADER 2.00*2.00mm
RIGHT ANGLE TYPE

NEW PART NO.

226-9x-xxxxxx