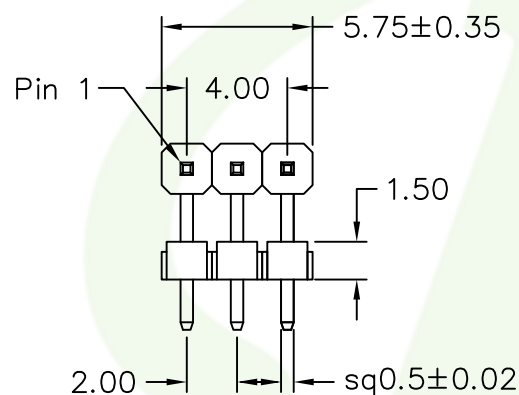



Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

228-x 1- xx x x xx
1 2 3 4 5 6

- 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
Plastic Height=1.5mm
- 6: Single row
Plastic Height=2.0mm
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.



			TOLERANCE		UNITS : mm		OLD PART NO.		TITLE		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30					PIN HEADER 2.00*2.00mm		
			.00	=±.20					RIGHT ANGLE TYPE,		
			.000	=±.XXX					SINGLE ROW, DUAL INSULATORS		
A	RELEASE	2020/10/26	.0000=±.		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
REV.	DESCRIPTION	DATE	ANG.=±3'		NONE	A4	1 OF 1	A	李創	228-x1-xxxxxx	228-x1-xxxxxx(網頁專用圖)