


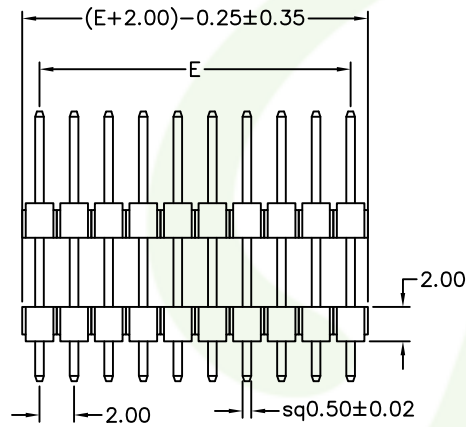
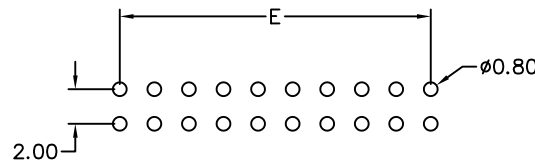


SINGLE ROW

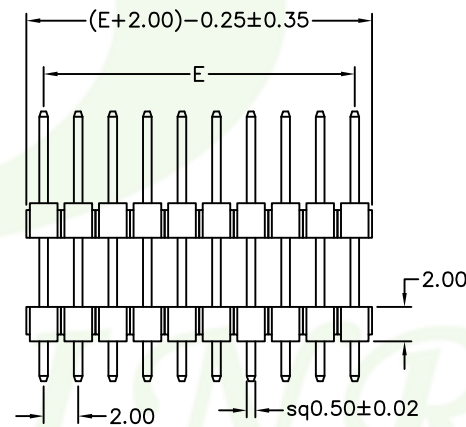

Recommended P.C.B Layout

DUAL ROWS

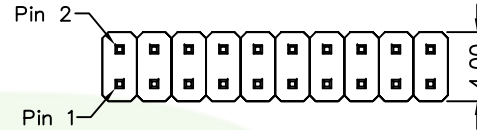

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

22M-x x- xx x x xx
1 2 3 4 5 6

- 7: Green Product
- 8: Green Product
- 9: Green Product High Temp
- 1: Single row Plastic Height=1.5mm
- 2: Dual row Plastic Height=1.5mm
- 6: Single row Plastic Height=2.0mm
- 7: Dual rows Plastic Height=2.0mm
3. No. of contacts per row
4. G: Gold flash
- T: Tin plated
- S: Selective
5. B: Black Insulator
- R: Red Insulator
- Y: Yellow Insulator
- U: Blue Insulator
- G: Gray Insulator
- W: White Insulator
- P: Purple Insulator
- E: Green Insulator
6. Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	40.00
2	2.00	22	42.00
3	4.00	23	44.00
4	6.00	24	46.00
5	8.00	25	48.00
6	10.00	26	50.00
7	12.00	27	52.00
8	14.00	28	54.00
9	16.00	29	56.00
10	18.00	30	58.00
11	20.00	31	60.00
12	22.00	32	62.00
13	24.00	33	64.00
14	26.00	34	66.00
15	28.00	35	68.00
16	30.00	36	70.00
17	32.00	37	72.00
18	34.00	38	74.00
19	36.00	39	76.00
20	38.00	40	78.00


文管中心
2020.11.04
發行
If you need other dimensions,
please fill out Dim A/B/C or
contact our sales representatives.

DIM A	DIM B	DIM C

REV.	DESCRIPTION	DATE
A	RELEASE	2020/10/26

TOLERANCE

.0 =±.30
.00 =±.20
.000 =±.XXX
.0000=±.
ANG.=±3°



UNITS : mm

SCALE NONE
SIZE A4

OLD PART NO.

DRAWER 麦文慧

SHEET 1 OF 1

REV. A

CHECK 李剑

APP'D 李剑

TITLE

PIN HEADER 2.00*2.00mm,STRAIGHT
TYPE,OPPOSITE INSULATORS

NEW PART NO.

22M-xx-xxxxxx



频锐科技股份有限公司

PINREX TECHNOLOGY CORP.

DRAW NO.

22M-xx-xxxxxx(網頁專用圖)