
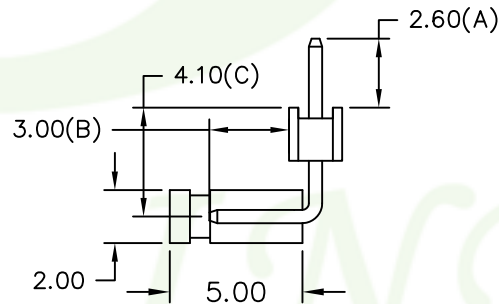
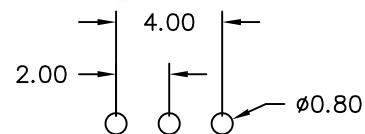
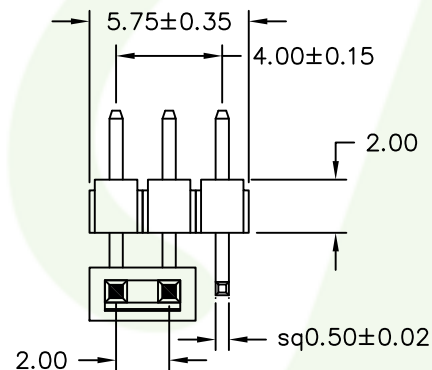


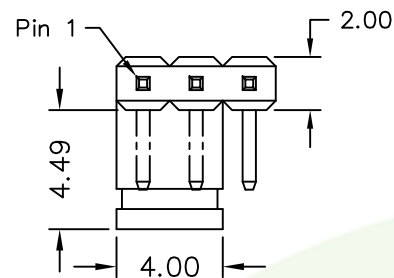

MATERIAL

Pin Header: Brass

Mini Jumper: Phosphar Bronze

Insulator : Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

22R-x 6- xx x x xx
1 2 3 4 5 6

- 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
Plastic Height=1.5mm
- 6: Single row
Plastic Height=2.0mm
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.
Pin Header: Black Insulator
Mini Jumper: 200-72-PCGU04
2.0mm Close 5.0mm, Blue Insulator(2935C)

Recommended P.C.B Layout



			TOLERANCE				OLD PART NO.		TITLE PIN HEADER 2.00*2.00mm RIGHT ANGLE TYPE, SINGLE ROW +MINI JUMPER		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
			.0	=±.30	UNITS : mm		DRAWER 麦文慧				
			.00	=±.20			SHEET 1 OF 1		REV. A		
			.000	=±.XXX			SCALE NONE		SIZE A4		
A RELEASE			2020/10/26	.0000=±.			APP'D 李剑		NEW PART NO. 22R-x6-xxxxxx	DRAW NO. 22R-x6-xxxxxx(網頁專用圖)	
REV. DESCRIPTION			DATE	ANG.=±3'							
											</