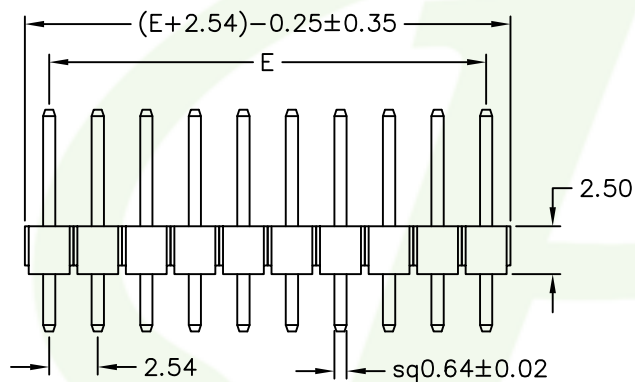
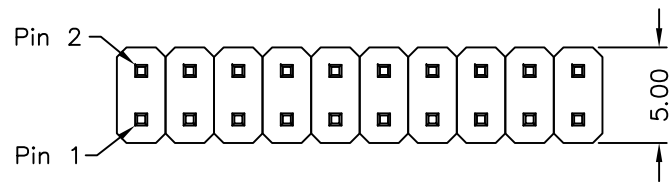


MATERIAL

Contact Pin : Brass

Insulator: Thermoplastic High Temp UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA


Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

210-x 2- xx x x 01
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- G: Gold flash
- S: Selective
- T: Tin plated
- B: Black Insulator
- W: White Insulator
- Pinrex internal code.

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

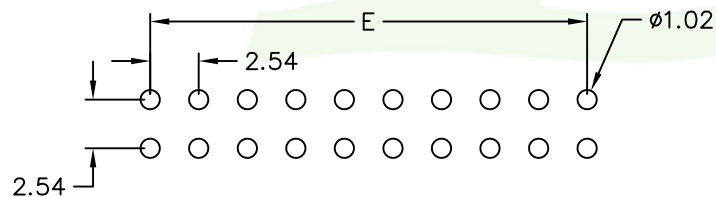

Recommended P.C.B Layout



TOLERANCE			UNITS : mm		OLD PART NO.		TITLE		PINREX	頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
.0	=±.30				DRAWER	麦文慧	CHECK	李创		
.00	=±.20				SCALE	NONE	SIZE	A4	NEW PART NO.	210-x2-xxxx01
.000	=±.XXX				SHEET	1 OF 1	REV.	A	APP'D	李创
.0000=±.										
ANG.=±3'										
A	RELEASE	2020/10/28								
REV.	DESCRIPTION	DATE								