


R6系列翘板开关



技术参数 SPECIFICATION:

安规认证 (safety approval) :UL, CUL, VDE, ENEC, CQC
 电气规格 (Electrical rating) :6A 250VAC, 10A125VAC
 机械寿命 (Mechanical life endurance) :30000 cycles
 电器寿命 (Electrical life endurance) :10000 cycles
 接触电阻 (Contact resistance) :<20mΩ
 绝缘电阻 (Insulation resistance) :>1000MΩ
 环境温度 (Ambient temperature) :>T85/T105
 防火等级 (Flammability) :UL94 V-2. UL94 V-0.灼热丝, 针焰测试
 外壳材料 (Material of housing) :PA66
 触电材料 (Contacts) :银合金 (Silver alloy)
 端子材料 (Terminal) :铜镀镍 (Copper silver plated)
 端子焊性 (Solder ability of terminal) :Max 350°C 3S, 用手焊接时, 不可给端子施加压力


料号 Ordering Procedure

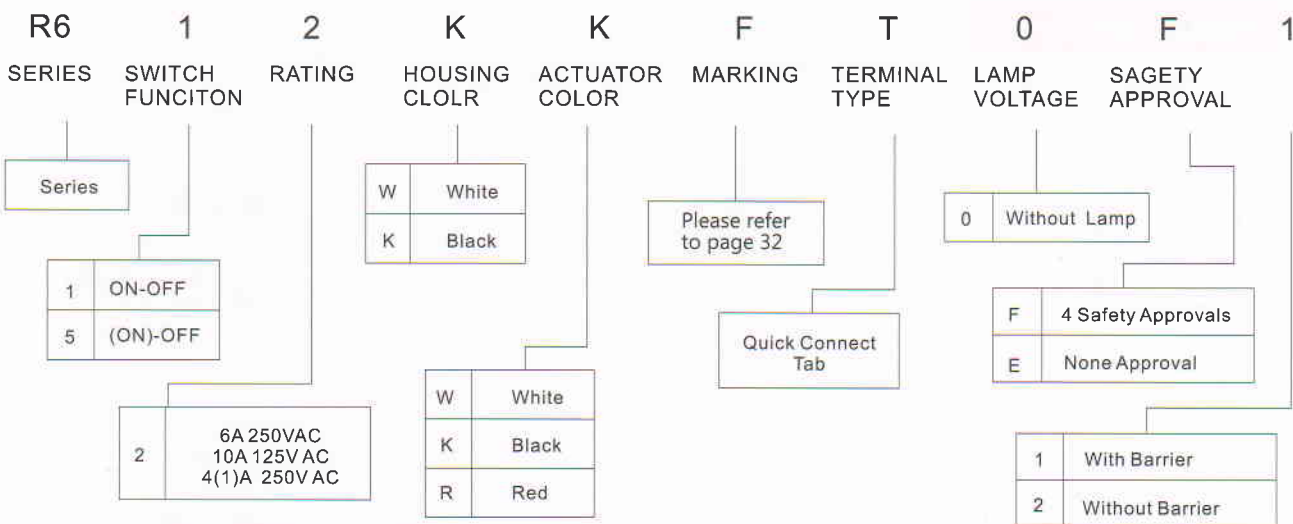


开关功能 Option Of Switch Function

Item NO	POLES &THROWS	Rocker position ():Momentary		
		Left	Center	Right
R61	SPST	ON	None	OFF
R66	SPST	(ON)	None	OFF

外形尺寸 Dimension

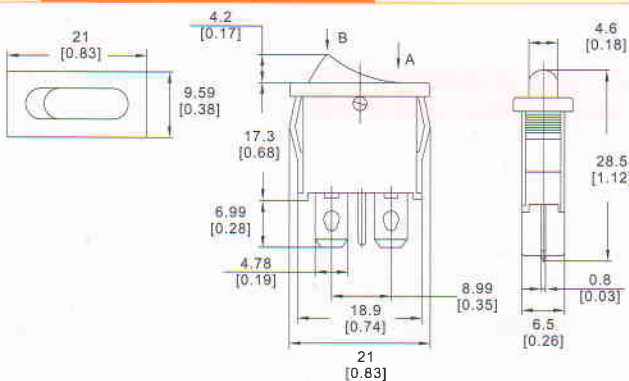

开孔尺寸 Panel Cut Out



Z	Y	X
0.70-1.25	6.90-7.00[272-276]	19.20-19.30
1.25-2.00	6.90-7.00[272-276]	19.25-19.35
2.00-3.00	6.90-7.00[272-276]	19.30-19.40

