



RB系列翘板开关



技术参数 SPECIFICATION:

- 安规认证 (safety approval) :UL, CUL, CQC
- 电气规格 (Electrical rating) :6A 250VAC, 10A125VAC
- 机械寿命 (Mechanical life endurance) :30000 cycles
- 电器寿命 (Electrical life endurance) :10000 cycles
- 接触电阻 (Contact resistance) :<20mΩ
- 绝缘电阻 (Insulation resistance) :>1000MΩ
- 环境温度 (Ambient temperature) :>T85/T105
- 防火等级 (Flammability) :UL94 V-2. UL94 V-0.灼热丝, 针焰测试
- 外壳材料 (Material of housing) :PA66
- 触电材料 (Contacts) :银合金 (Silver alloy)
- 端子材料 (Terminal) :铜镀镍 (Copper silver plated)
- 端子焊性 (Solder ability of terminal) :Max 350°C 3S, 用手焊接时, 不可给端子施加压力


料号 Ordering Procedure

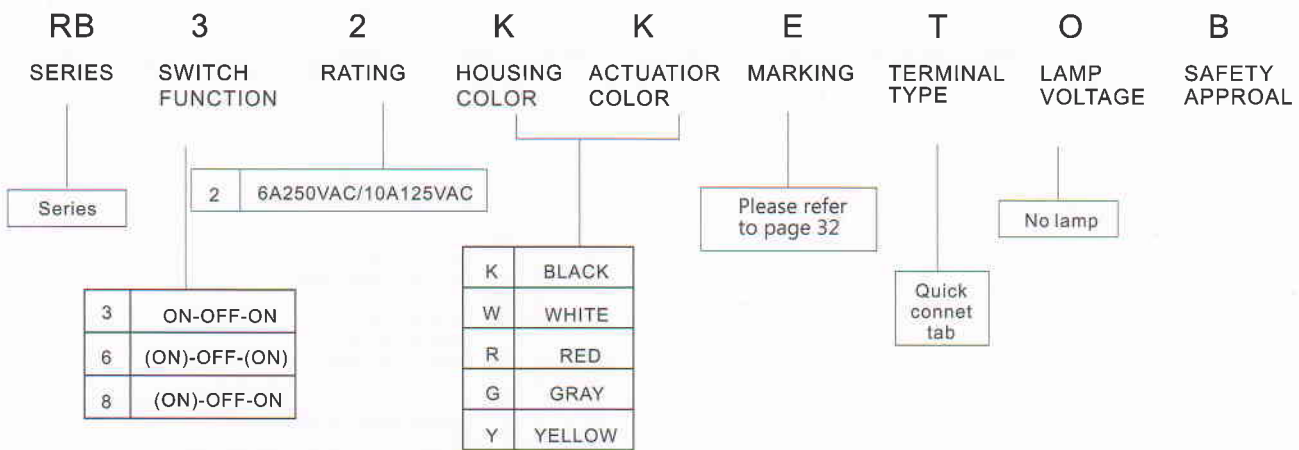


开关功能 Option Of Switch Function

Item NO	Poles\$ Throws	Rocker position():Monmentary		
		Left	Center	Right
RB3	DPDT	ON	OFF	ON
RB6	DPDT	(ON)	OFF	(ON)
RB8	DPDT	(ON)	OFF	ON

外形尺寸 Dimension:

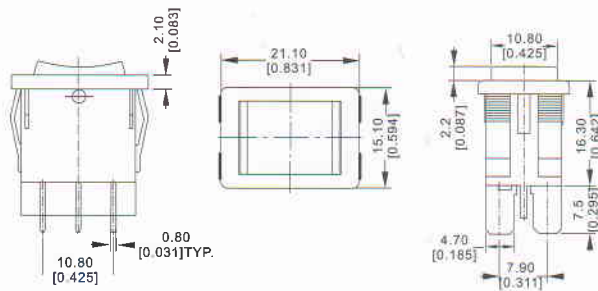

开孔尺寸 Panel Cut Out



Z	Y	X
0.7-1.25[0.28-0.49]	13.0-13.1[511-515]	19.10-19.20[752-756]
1.25-2.0[0.49-0.79]	13.0-13.1[511-515]	19.30-19.40[760-764]
2.0-3.0[0.79-0.118]	13.0-13.1[511-515]	19.50-19.60[768-772]



RB32WWET0B



RB62RRBT0B



RB32KKBT0B