


V1.0.01





注1)：暗电流为避光30分钟后的测定值
正弦振动：20g 冲击：100g (11ms)

典型坪曲线

- 石油测井

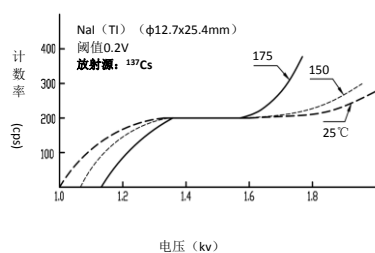

管座图 (单位mm)

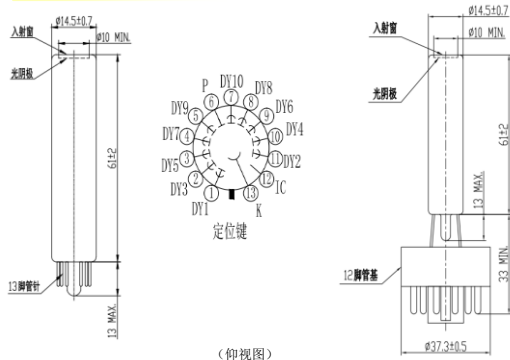

K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
	1	1	1	1	1	1	1	1	1	1	1

K: 阴极 Dy: 倍增极 P: 阳极